




- ▶ Contact rating : 18A 125VDC UL & C-UL  
25A 125VAC  
1HP 125VAC 2HP 250VAC  
13(13A) 250~ 5E4 ENEC  
15(15)A 125V~ 5E4
- ▶ Contact resistance :  
Resistance when new : 10mΩ max.  
Resistance after el.endurance test : 50mΩ max.
- ▶ Insulation resistance : 500MΩ(min.) 500VDC
- ▶ Operation life for loading : 50,000 cycles(min.)
- ▶ Operation force : full stroke 18±5N in DIRECTION A  
full stroke 42±5N in DIRECTION B
- ▶ The position of vertical force measurement : ON "P"
- ▶ Lock type : 
- ▶ Lock off : with letter "A"
- ▶ Material used must be comply with BQI-0555.

Dimensions in mm

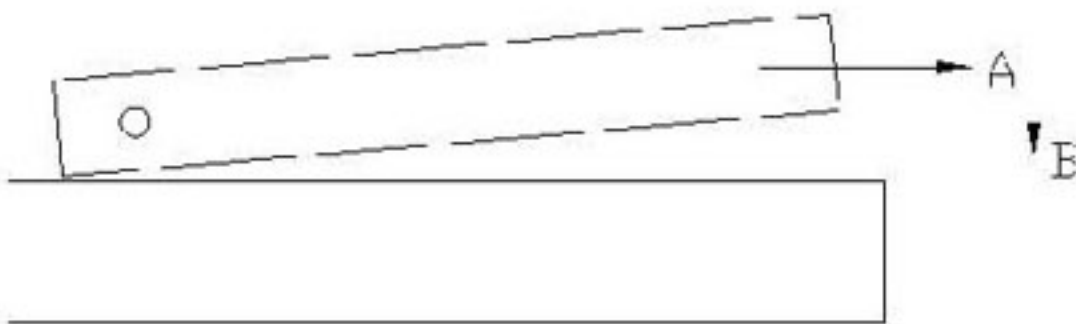