

**Product Description:**

- Tinned ,annealed,stranded or solid copper conductor.
- TPE insulation.
- Rated temperature:105°C.Rated voltage:600volts
- Uniform thickness of wire to ensure easy stripping and cutting.
- Passes UL VW-1&CUL FT1 vertical flame test
- **Top coated conductor is available**

**说明:**

- 导体使用单股或绞线裸铜或镀锡铜
- TPE绝缘
- 额定温度：105℃额定电压：600Volts
- 使用标准厚度，易剥，截断容易。
- 可通过UL VW-1 及 CUL FT1，垂直燃烧测试
- 可使用先绞后镀（TC）为导体

**Application**


- Motor leads or internal wiring of appliances (such as refrigerating equipment, room cooler units and heat pumps).

**应用:**

- 电机引线或器具内部布线(如冷藏设备,冷气机组和热泵)

**Construction:**

**构造:**

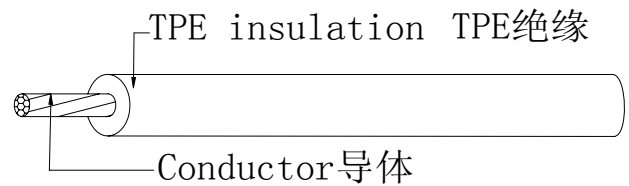

UL Style& CUL Type	Conductor		Insulation Thickness mm	Overall Diameter mm	Standard Put-up		Conductor Resistance at 20°C Ω/KM
	AWG	No/mm			Ft/coil	M/Coil	
UL10187 CUL (Stranded)	26	7/0.16	1.524	3.50	2000	610	150.00
	24	11/0.16	1.524	3.70	2000	610	94.20
	22	17/0.16	1.524	3.90	2000	610	59.40
	20	21/0.178	1.524	4.10	2000	610	36.70
	18	34/0.178	1.524	4.40	2000	610	23.20
	16	26/0.25	1.524	4.80	2000	610	14.60
UL10187 CUL (Top-coated)	26	7/0.16	1.524	3.50	2000	610	140.00
	24	7/0.20	1.524	3.70	2000	610	88.70
	22	7/0.25	1.524	3.90	2000	610	54.70
	20	7/0.31	1.524	4.10	2000	610	37.10
	18	7/0.40	1.524	4.40	2000	610	23.70
	16	7/0.488	1.524	4.80	2000	610	14.20
UL10187 CUL (Solid)	26	1/0.404	1.524	3.50	2000	610	143.00
	24	1/0.511	1.524	3.70	2000	610	89.30
	22	1/0.643	1.524	3.90	2000	610	56.40
	20	1/0.813	1.524	4.10	2000	610	35.20
	18	1/1.024	1.524	4.40	2000	610	22.20
	16	1/1.29	1.524	4.80	2000	610	14.00