



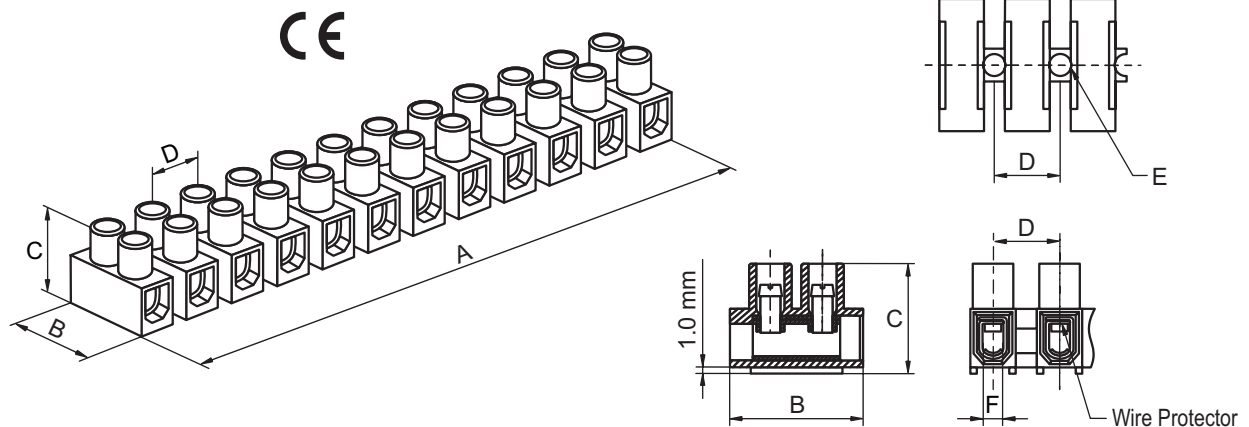

TERMINAL BLOCKS (H Type)

2 - 12 poles, provided with a 1.0 mm raised base

- **Housing:** Polyamide 66 (PA 66), white
flame-retardant to UL94V-2
Working temperature:
-30°C to T110°C (IEC), 105°C/221°F (UL)
Polypropylene (PP), white
flame-retardant to UL94V-2
Working temperature: -30°C to 85°C
- **Terminal Body:** Steel provide with or without a brass strip
nickel-plated
- **Screw:** Steel, zinc-plated
- **Strip Length:** 6.5 mm / 0.26 in.

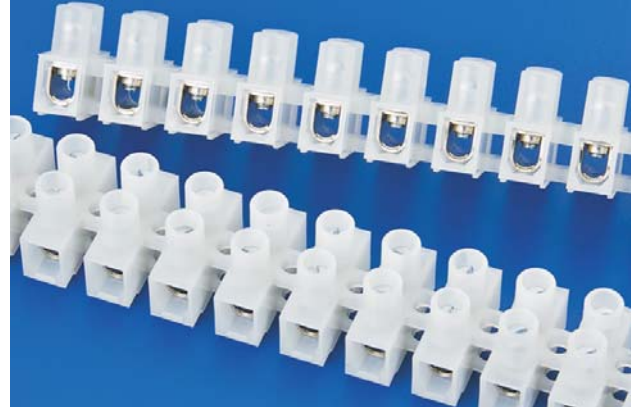

Dimensions:

Model	Desc.	Cross-Section	Wire Range (Cu, AWG)	Screw	Dimensions (mm/inches)							Packing
					Unit	A	B	C	D	E	F	
PA30	PA material w/o brass strip	4 mm ²	#22 - #10 Sol / Str	M3.0x6	mm	116.8	19.20	16.70	10.00	3.60	3.6±0.1	50 Pcs/Bag 500 Pcs/Ctn
					in.	4.598	0.756	0.657	0.394	0.142	0.142	
PA30P	PP material w/o brass strip	4 mm ²	#22 - #10 Sol / Str	M3.0x6	mm	116.8	19.20	16.70	10.00	3.60	3.6±0.1	50 Pcs/Bag 500 Pcs/Ctn
					in.	4.598	0.756	0.657	0.394	0.142	0.142	
PA31	PA material w/ brass strip	4 mm ²	#22 - #10 So / Strl	M3.0x6	mm	116.8	19.20	16.70	10.00	3.60	3.6±0.1	50 Pcs/Bag 500 Pcs/Ctn
					in.	4.598	0.756	0.657	0.394	0.142	0.142	
PA31P	PP material w/ brass strip	4 mm ²	#22 - #10 Sol / Str	M3.0x6	mm	116.8	19.20	16.70	10.00	3.60	3.6±0.1	50 Pcs/Bag 500 Pcs/Ctn
					in.	4.598	0.756	0.657	0.394	0.142	0.142	

Approvals:

Model	U.S.A. 		Germany 	Finland 			China 			
PA30 PA30P	300 V 35 A #22-#10		450 V 32 A 4 mm ²	450 V 32 A 4 mm ²			450 V 32 A 4 mm ²			
PA31 PA31P	300 V 30 A #22-#10		450 V 32 A 4 mm ²	450 V 32 A 4 mm ²			450 V 32 A 4 mm ²			