

Product Description:

- Tinned ,annealed,stranded or solid copper conductor.
- XL-PVC insulation.
- Rated temperature:80℃.Rated voltage:150volts
- Passes UL VW-1&CSA FT1 vertical flamt test
- **Resistant to heat,cold,abrasion,tinned** flexibility,cut-through,oil,etc.

说明:

- 导体使用单股或绞线裸铜或镀锡铜
- 照射PVC绝缘
- 额定温度：80℃ 额定电压：150Volts
- 可通过UL VW-1 及 CSA FT1 ，垂直燃烧测试
- 具耐热性，耐寒性，耐摩擦，耐焊锡收缩性，耐切穿性，耐油性等。

APPLications:


- For electric Cookers,Hair dryers, incoming wires of transformer,air-condit ioners,lights fixture,electric ovens etc

应用:

- 用于电饭锅、吹风机高温部，变压器输入线，空调，照明灯具，电烤箱等。

Construction:

构造:

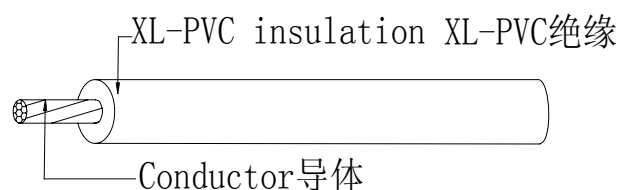

UL Style& CSA Type	Conductor		Insulation Thickness	Overall Diameter	Stand Put-up		Conductor Resistance at 20℃
	AWG	No/mm			mm	mm	
UL1429 CSA AWM I A/B (Stranded)	30	7/0.102	0.23	0.80	2000	610	381.00
	28	7/0.127	0.23	0.90	2000	610	239.00
	26	7/0.16	0.23	1.00	2000	610	150.00
	24	11/0.16	0.23	1.10	2000	610	94.20
	22	17/0.16	0.23	1.30	2000	610	59.40
	20	21/0.178	0.23	1.50	2000	610	36.70
	18	34/0.178	0.23	1.70	2000	610	23.20
UL1429 CSA AWM I A/B (Top- coated)	30	7/0.102	0.23	0.80	2000	610	397.00
	28	7/0.127	0.23	0.90	2000	610	248.00
	26	7/0.16	0.23	1.00	2000	610	140.00
	24	7/0.20	0.23	1.10	2000	610	88.70
	22	7/0.254	0.23	1.30	2000	610	54.70
	20	7/0.32	0.23	1.50	2000	610	37.10
UL1429 CSA AWM I A/B (Solid)	26	1/0.404	0.23	0.90	2000	610	143.00
	24	1/0.511	0.23	1.00	2000	610	89.30
	22	1/0.634	0.23	1.15	2000	610	56.40
	20	1/0.813	0.23	1.30	2000	610	35.20
	18	1/1.024	0.23	1.50	2000	610	22.20