

Product Description:

- Tinned ,annealed,stranded or solid copper conductor.
- Color -coded TPE insulation.
- Rated temperature:105℃.Rated voltage:600volts
- Uniform thickness of wire to ensure easy stripping and cutting.
- Passes UL VW-1&CUL FT1 vertical flamt test
- Top coated conductor is available

说明:

- 导体使用单股或绞线裸铜或镀锡铜
- TPE绝缘
- 额定温度：105℃额定电压：60
- 使用标准厚度，易剥，截断容易。
- 可通过UL VW-1 及 CUL FT1 ，垂直燃烧测试
- 可使用先绞后镀（TC）为导体

Applications:


- Motor leads or internal wiring of appliances.

应用:

- 用于电机引线、或电器设备内部布线

Construction:

构造:

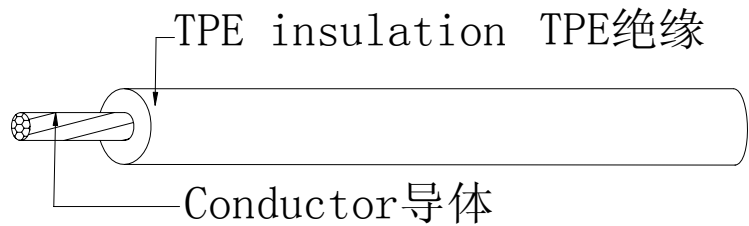

UL Style& CUL Type	Conductor		Insulation Thickness mm	Overall Diameter mm	Standard Put-up		Conductor Resistance at 20℃ Ω/KM
	AWG	No/mm			Ft/coil	M/Coil	
UL1698 CUL (Stranded)	28	7/0.127	0.76	2.00	2000	610	239.00
	26	7/0.16	0.76	2.10	2000	610	150.00
	24	11/0.16	0.76	2.20	2000	610	94.20
	22	17/0.16	0.76	2.40	2000	610	59.40
	20	21/0.178	0.76	2.50	2000	610	36.70
	18	34/0.178	0.76	2.80	2000	610	23.20
	16	26/0.25	0.76	3.10	1000	305	14.60
	14	41/0.25	0.76	3.50	1000	305	8.96
	12	65/0.25	0.76	4.00	1000	305	5.64
UL1698 CUL (Top- coated)	10	105/0.25	0.76	4.60	1000	305	3.55
	26	7/0.16	0.76	2.10	2000	610	140.00
	24	7/0.20	0.76	2.20	2000	610	88.70
	22	7/0.25	0.76	2.40	2000	610	54.70
	20	7/0.32	0.76	2.60	2000	610	37.10
	18	7/0.4	0.76	2.80	2000	610	23.70
UL1698 CUL (Solid)	16	7/0.488	0.76	3.10	1000	305	14.20
	28	1/0.32	0.76	1.90	2000	610	227.00
	26	1/0.404	0.76	2.00	2000	610	143.00
	24	1/0.511	0.76	2.10	2000	610	89.30
	22	1/0.634	0.76	2.20	2000	610	56.40
	20	1/0.813	0.76	2.40	2000	610	35.20
	18	1/1.024	0.76	2.60	2000	610	22.20
	16	1/1.29	0.76	2.90	1000	305	14.00
	14	1/1.628	0.76	3.20	1000	305	8.78
	12	1/2.052	0.76	3.60	1000	305	5.53
10	1/2.588	0.76	4.20	1000	305	3.48	