



SHANGHAI UPG INTERNATIONAL TRADING CO., LTD

---



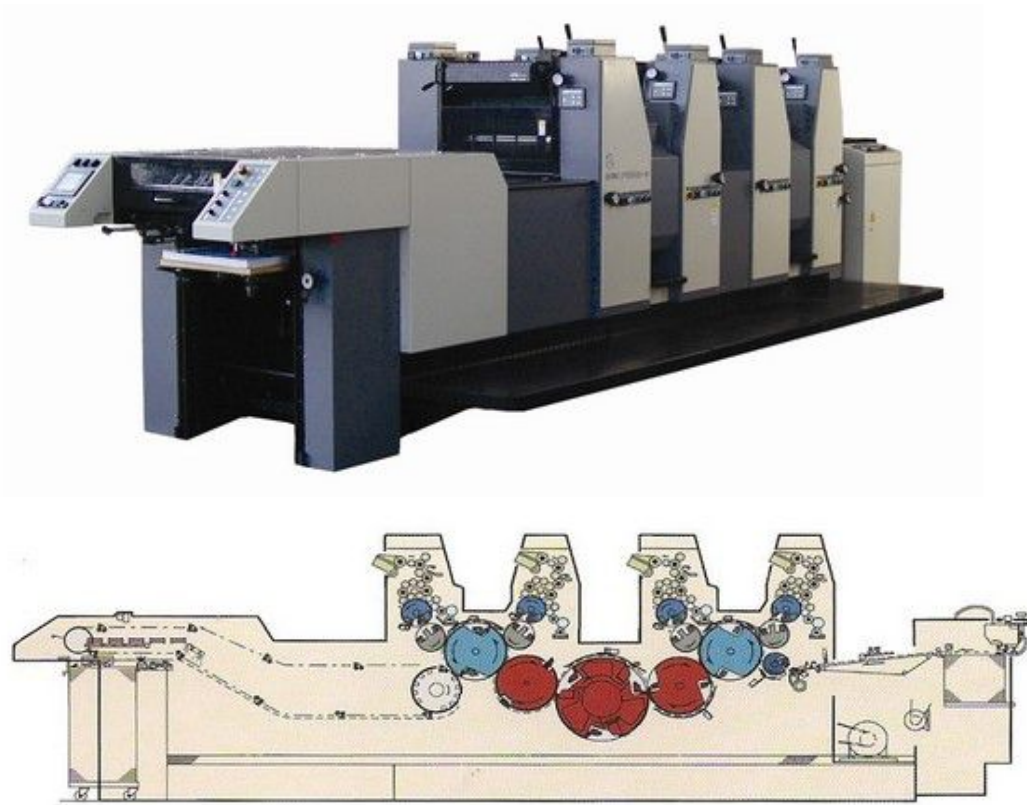
## WIN524 Four-color Offset Press

Add: Room 2403 Jincheng Mansion 511 Tianmuxi Road, 200070 P.R.China

TEL: 86-21-63177436 FAX: 86-21-63538343

Email: [grace@shanghai-upg.com](mailto:grace@shanghai-upg.com)

---

**WIN524 Four-color Offset Press****Performance:**

- 1) Heavy duty mechanism structure. Cast iron pedestal, frame, cylinders etc. have the good intension and tenacity, ensuring high stability and good printing impression.
- 2) Underswing feeder, paper transferring structure is used, high point gripper closed structure, insuring paper transferring system more stably.
- 3) Double diameter impression cylinder and triple diameter transferring cylinder are available, reducing the times of paper connection, improving register precision.
- 4) Plate cylinder and blanket cylinder go through with bearer, running stably, ensuring qualified printing image.
- 5) Pneumatic control system, ensuring the press more stably.
- 6) High precision imported bearing, ensuring cylinder impression even in the high speed rotation.
- 7) Chromed cylinder, prolongs the operation life.
- 8) Automatic centralized oiling system, prolongs the working life.
- 9) Operators are under protection because of the installation of safety guard, adjustment door and protecting shield.
- 10) Plate adjustment function in vertical lateral and cocking position. The

minimum adjustment is based on 0.01mm, saving auxiliary adjustment time.

- 11) Semi-automatic plate loader and tightening equipment, make the plate loading more easy and convenient, shorten plate changing time, improving working efficiency.
- 12) Paper fed continuously and stably, more suitable for thick and thin paper printing.
- 13) Vacuum sucker table, 3 sucker type paper feed tape insures all kinds of paper conveying.
- 14) Special design in paper feed head, paper board, paper board, front

#### Specification

Max. Paper size (W×L)(mm)	520x375
Min. Paper size (W×L)(mm)	200 x 155
Paper thickness (mm)	0.04-0.4
Max. Printing area(W×L) (mm)	505x350
Printing speed (s/h)	3000-12000
Plate size (mm)	510x400
Plate thickness (Total)(mm)	0.3
Blanket size (mm)	528 x 437 x 1.9
Under blanket size (mm)	505x 389x0.6
Feeding system	Rotary type stream feeder
Feeding pile capacity (mm)	Height 550Weight 150 Kg)
Delivery system	Chain delivery
Delivery pile capacity (mm)	Height 430 (Weight 120 Kg)
Infeed system	Underswing gripper and paper feed drum
Number of rollers	Ink rollers: 17      Water rollers: 4
Gripper margin (mm)	9± 1
Registration system	Pull side guide, drop-away front lay(diagonal adjustment possible)
Vertical image adjustment range (mm)	± 20
Vertical image micro adjustment range (mm)	±1
Lateral image micro adjustment range (mm)	±2
Declining image micro adjustment range (mm)	±0.15 (Max, printing area)
Oiling system	Centralized oiling system
Power	3 Phase 380V 50Hz
Wattage (KW)	12



SHANGHAI UPG INTERNATIONAL TRADING CO., LTD

Motor wattage (KW)	Main motor 11 Pump motor 0.75
Dimensions Lx W x H (mm)	4200x2300x 1710
Net weight (Kg)	8000