


AWWA Resilient Seated Gate Valves NRS MJ+MJ / FL+MJ 200/250PSI

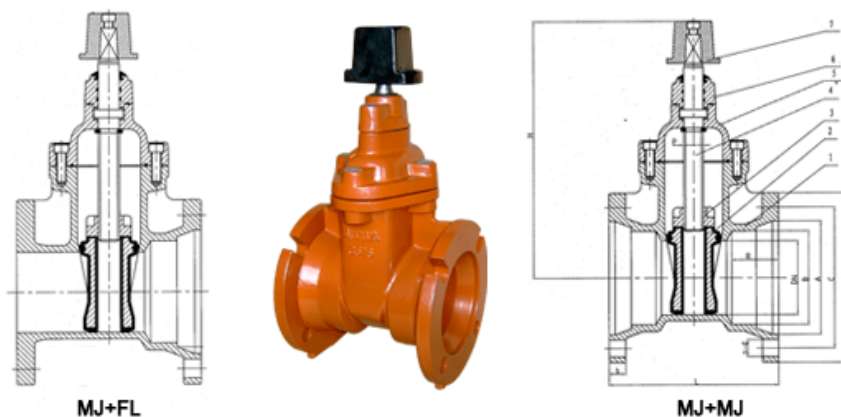

DESCRIPTION

- 1.Design confirms to:AWWA C509/C515
- 2.MJ confirms to:AWWA C153/A21.53
- 3.Test & Inspection: AWWA C509/C515
- 4.Suitable medium: water and neutral liquid
- 5.Working temperature: NBR≤80℃, EPDM≤120℃
- 6.Operator: handwheel, nut, extension stem, gear operator

MATERIAL LIST

No.	PART	MATERIAL
1	BODY	DI ASTM A536
2	WEDGE	DI A536 NBR/EPDM
3	STEM NUT	BRONZE C83600
4	STEM	420/304
5	BONNET	DI ASTM A536
6	GLAND	DI A536/BRASS
7	HANDWHEEL	DI ASTM A536

DIMENSION(mm)

DN	L	H	C	A	B	R	D	b	n-d
3"	203	310	157.2	127	104.5	63.5	195	17	4-22.3
4"	229	350	190.5	154.2	126.3	63.5	231	17	4-22.3
6"	267	482	241.3	207.5	179.5	63.5	282	17	6-22.3
8"	292	520	298.5	262	234	63.5	340	19	6-22.3
10"	330	632	355.6	314	286	63.5	397	19	8-22.3
12"	356	745	413	367	339	63.5	454	19	8-22.3
14"	381	835	476.3	420.1	392.2	88.9	523	20.1	10-22.3
16"	406	953	533.4	473.5	445.5	88.9	580	21.6	12-22.3
18"	432	1050	590.6	526.8	498.9	88.9	638	25.4	12-22.3
20"	457	1280	647.7	580.1	552.2	88.9	695	25.9	14-22.3
24"	508	1435	762	686.8	658.9	88.9	810	25.9	16-22.3