

Product Description:

- Tinned, annealed, stranded or solid copper conductor.
- PP, PE or FR-PE insulation
- TPU jacketed
- Tinned or bare copper wire spiral or braid shield
- Rated temperature: 80°C. Rated voltage: 300Volts
- Passes UL VW-1 & CUL FT1 vertical flame test

说明:

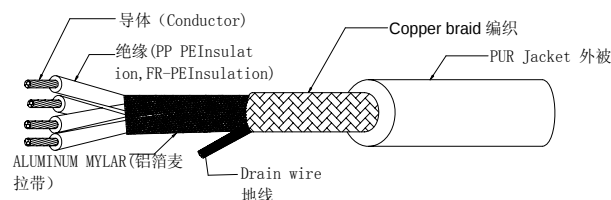
- 导体使用单股或绞线裸铜或镀锡铜。
- PP PE 或者 FR-PE 绝缘
- PUR 被覆
- 裸铜或镀锡铜丝，缠绕或编织屏蔽
- 额定温度：80℃ 额定电压：300Volts
- 可通过 UL VW-1 及 CUL FT1，垂直燃烧测试

Applications:

- External interconnection of electronic equipment

应用:

- 用于电脑及视听设备内部连线。

Construction:**构造:**

UL Style & CUL Type	Cores	Conductor		Insulation Thickness	Nom. Dia	Shield Coverage	Jacket Thickness	Overall Diameter	Conductor Resistance at 20°C
		AWG	No/mm	mm	mm	%	mm	mm	Ω/KM
UL20233 CUL (Stranded)	2C	30	7/0.100	0.23	0.80	≥65	0.76	3.60	381.00
		28	7/0.127	0.23	0.90	≥65	0.76	3.90	239.00
		26	7/0.16	0.23	1.00	≥65	0.76	4.00	150.00
		24	11/0.16	0.23	1.10	≥65	0.76	4.20	94.20
		22	17/0.16	0.23	1.30	≥65	0.76	4.60	59.40
		20	21/0.178	0.23	1.50	≥65	0.76	5.00	36.70
		18	34/0.178	0.23	1.80	≥65	0.76	5.60	23.20
		16	26/0.25	0.23	2.00	≥65	0.76	7.80	14.60
UL20233 CUL (Stranded)	3C	30	7/0.100	0.23	0.80	≥65	0.76	5.50	381.00
		28	7/0.127	0.23	0.90	≥65	0.76	5.70	239.00
		26	7/0.16	0.23	1.00	≥65	0.76	5.90	150.00
		24	11/0.16	0.23	1.10	≥65	0.76	6.10	94.20
		22	17/0.16	0.23	1.30	≥65	0.76	6.50	59.40
		20	21/0.178	0.23	1.50	≥65	0.76	7.00	36.70
		18	34/0.178	0.23	1.80	≥65	0.76	7.60	23.20
UL20233 CUL (Stranded)	4C	30	7/0.100	0.23	0.80	≥65	0.76	5.70	381.00
		28	7/0.127	0.23	0.90	≥65	0.76	5.90	239.00
		26	7/0.16	0.23	1.00	≥65	0.76	6.20	150.00
		24	11/0.16	0.23	1.10	≥65	0.76	6.50	94.20
		22	17/0.16	0.23	1.30	≥65	0.76	6.90	59.40
		20	21/0.178	0.23	1.50	≥65	0.76	7.40	36.70
UL20233 CUL (Stranded)	5C	30	7/0.100	0.23	0.80	≥65	0.76	6.00	381.00
		28	7/0.127	0.23	0.90	≥65	0.76	6.30	239.00
		26	7/0.16	0.23	1.00	≥65	0.76	6.40	150.00
		24	11/0.16	0.23	1.10	≥65	0.76	6.80	94.20
		22	17/0.16	0.23	1.30	≥65	0.76	7.40	59.40
UL20233 CUL (Stranded)	6C	30	7/0.100	0.23	0.80	≥65	0.76	6.40	381.00
		28	7/0.127	0.23	0.90	≥65	0.76	6.70	239.00
		26	7/0.16	0.23	1.00	≥65	0.76	7.00	150.00
		24	11/0.16	0.23	1.10	≥65	0.76	7.30	94.20