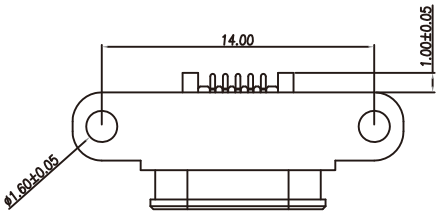



P.C.B LAYOUT

FIG.1 MOUNT CONDITION

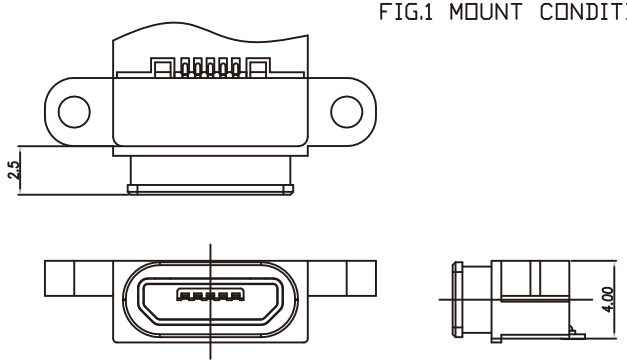

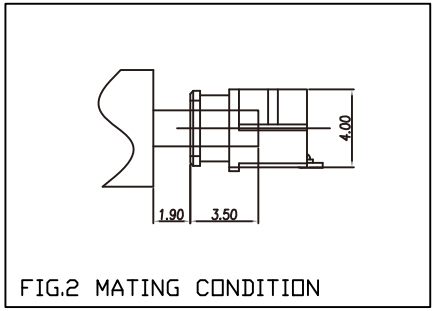

FIG.2 MATING CONDITION

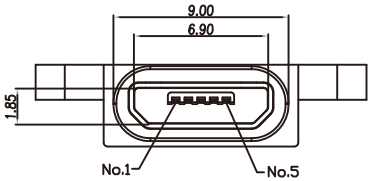

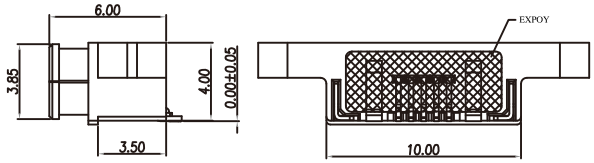



1. MATERIAL :
   1-1. HOUSING : LCP UL94V-0 ; COLOR : BLACK
   1-2. CONTACT : PHOSPHOR BRONZE
   1-3. SHELL : STAINLESS STEEL
   1-4. O-RING : SILICON
   1-5. PAD : BRASS
2. FINISH :
   2-1. CONTACT : CONTACT AERA : GOLD 10u"
   GOLD FLASH ON OTHER AERA
   UNDERPLATED : NICKEL 50u"
   2-2. SHELL : MATTE TIN PLATED
   2-3. PAD : MATTE TIN PLATED

FIG.3 GASKET INTEGRATION CONDITION

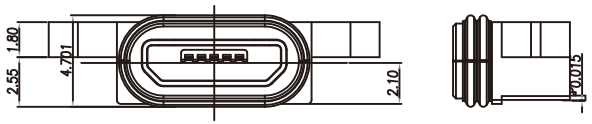

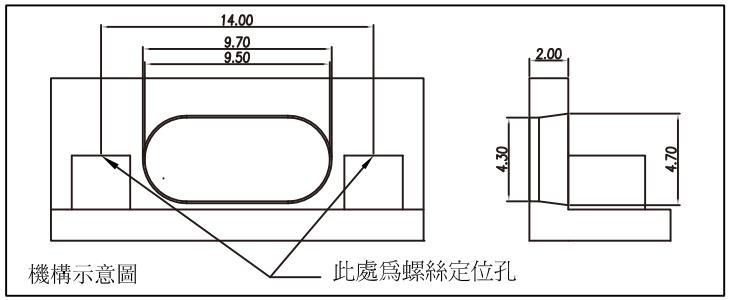

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ± 0.20
DATE		.XX ± 0.10
SIZE A4	PPOJECTION	.XXX ± 0.05
		ANG ± 1°



ORDER INFORMATION

WPMIB-SWE-5B-LF

- SERIES
- FEMALE
- 90°SMT
- EAR
- 5 PIN B TYPE
- LEADFREE

DESCRIPTION: waterproof micro usb 5P(F) SMT