


[Switching Adaptor](#)
[Linear Adaptor](#)
[DC-DC Converter](#)
[Car Adaptor](#)
[Transformer](#)
[AC-AC Converter](#)
[DC-AC Inverter](#)
[Open Frame](#)

## SWITCHING ADAPTOR DESKTOP-INLET SOCKET 150 SERIES



### ELECTRICAL SPECIFICATIONS

Input		Output	
Input Voltage Range	90-264V AC	Output Voltage	15-19-24V DC
Input Frequency	47-63Hz	Output Current	10A(150VA max)
Input Current	2A(max)	Output Tolerance	5%
		Ripple & Noise	1%p-p max
		Efficiency	>75%

### GENERAL SPECIFICATIONS


Temperatures		Humidity	
Operating Temperatures	10 to +40°C	Operating Humidity	0 to 85% RH
Storage Temperatures	-20 to +70°C	Storage Humidity	5 to 95% RH
Hi-Pot Test		MTBF	
Hi-Pot	3000V AC	MTBF	50,000Hours at 25°C
EMISSION		SAFETY	
EMI/EMC	FCC	Safety Approvals	UL/CUL/TUV/GS/CCC/ K-mark/PSE/CE/CB
		Safety Compliant	UL 60950/EN 60950/ EN 60065

## OUTPUT SPECIFICATIONS SERIES NO. : IEC150

Plug Option



PART NO.	OUTPUT	
	VOLT	CURRENT (max)
IEC150-15010000	15.0V	10.00A
IEC150-1907900	19.0V	7.90A
IEC150-2406250	24.0V	6.25A

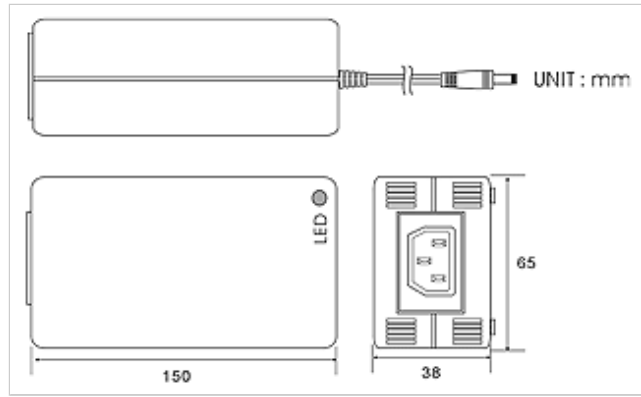

Tel: (886 2) 86603788 Fax: (886 2) 86605281 Email: [sfair@seed.net.tw](mailto:sfair@seed.net.tw) Copyright (C) 2007, Shining Fair Enterprises Co Ltd  
Address: 8F-2, No 326, Chung Ho Road, Chung Ho City, Taipei Hsien, Taiwan 235