


K3760
Convert plug (4mm)



K376975
Universal travel adapter
(2 to 5) different plugs
changeable




1. Side socket.
2. With voltage indicator.
3. Universal receptacle can accept different plugs all over the world.

K376977
Universal travel adapter
(2 to 5) different plugs
changeable




1. Europe universal inlay way.
2. Multinational universal receptacle.

K3761
Convert plug (4mm)

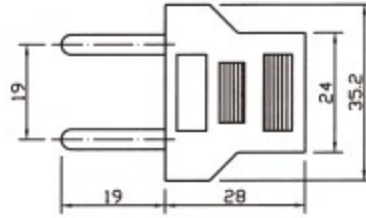

K3764 Convert plug (4mm)
K3765 Convert plug (5mm)




It does not perform voltage step-up or step-down conversion between 125V and 250V.




When use, please check and ensure your electronics apparatus can work with the local voltage.

K3766
Convert plug




K37671
Convert plug



Action 1
Suitable for area:
125V: Taiwan, Japan, U.S.A., Canada.
250V: Philippines, China, Thailand.




K37678
Convert plug



Action 2
Suitable for area:
250V: China, Australia, New Zealand.




K37692
Convert plug
W/plastic ground



Action 3
Suitable for area:
250V: England, Hong Kong, U.A.E., Singapore, Malaysia.




K37695
Convert plug



Action 4
Suitable for area:
250V: U.A.E., Russia, China, South America.
Down: turn right, close and screw down.



K37696
Convert plug



Action 5
Suitable for area:
250V: U.A.E., South America, E.U., Russia.(inlay way)
Up : turn left, open and screw down.



Universal USB/A type adaptor
SQ80002 x

- It is designed ultra-compact and light weight to provide fast and efficient charging solutions for cell phones or tablets at home, office, or on the road.


Specification:


Code	A	B	C	D
AC plug	US	EU	UK	Australia
Input voltage	100~240VAC (90~264VAC Min./Max.)			
Input frequency	50/60Hz Nom (47~63Hz Min./Max.)			
Inrush current	60A Max. at 25°C and 230VAC			
Output	2A 5VDC (2A~2.4A @ 3.5V~4.75V, CV mode)			
Output power	10W Max.			
Earth leakage current	20uA @ 264VAC/50Hz			
Efficiency	>79% (@2A and 4-pt average)			
Withstand voltage	primary to secondary, 3000VAC, 1 minute			
Safety standard	UL /CUL /CE /CB /BSMI /PSE /NRCAN			


Universal USB/A type quick charge 3.0 adaptor
SQ80004 x

- Tested and certified to QC3.0 standard.
- Automatic sensing and switching constantly at 3.6V-6V constant current mode (3A Max.) & 6.2V-12V constant power mode (18W Max.).
- It can power QC3.0-enabled devices efficiently to charge 4 times faster than conventional charging devices.


Specification:

Code	A	B	C
AC plug	US	EU	UK
Input voltage	100~240VAC (90~264VAC Min./Max.)		
Input frequency	50/60Hz Nom (47~63Hz Min./Max.)		
Inrush current	60A at 25°C, cold start		
Output current	0~3A		
Output power	18W Max.		
Earth leakage current	20uA Max.		
Average efficiency	85.45%		
Withstand voltage	3000VAC, primary to secondary 10mA 1 min.		
Safety standard	UL /CCC /CE /CB /SAA /C-Tick		


Universal USB/C type adaptor
SQ80006 x

- Automatic sensing and switching between 5V & 12V output voltages to charge MacBook and Chromebook.
- It allows the USB 3.1 cable reversible plug in with USB 3.1/C type receptacle.


Specification:

Code	A	B
AC plug	US	EU
Input voltage	100~240VAC (90~264VAC Min./Max.)	
Input frequency	50/60Hz Nom (47~63 Hz Min./Max.)	
Inrush current	60A Max. @240VAC, cold start	
Output	5V mode: 3~3.6A @ 4.75~3.8V output 12V operate @OCP mode: 3.6A Max.	
Output power	18W Max.	
Earth leakage current	20uA Max.	
Average efficiency	5V/3A: >81.84% ; 12V/1.5A: >85.45%	
Withstand voltage	3000VAC, primary to secondary 10mA 1 min.	
Safety standard	IEC /EN /UL 60950 standard	


SQ80010
Universal USB/A type adaptor

- Interchangeable AC clips is the best choice for users to travel lightly and easily.


Specification:

AC plug	US, EU, UK, Australia
Input voltage	100~240VAC (90~264VAC Min./Max.)
Input frequency	50/60Hz Nom (47~63Hz Min./Max.)
Inrush current	35A Max. @264VAC (cold start @ ambient 25°C)
Output voltage	4.75~5.25VDC (without cable/wire @25°C)
Output current	0~2A
Output power	10W Max.
Earth leakage current	20uA Max.
Average efficiency	79% Min. @ 115V/230VAC
Withstand voltage	3000VAC, primary to secondary 10mA 1 min.
Safety standard	IEC60950-1, CB


Universal USB/A type adaptor
SQ80013 x

- Supports fast charging protocol.
- Surge, overcharging, overcurrent, overvoltage and overheating protection.
- Built-in intelligent IC to automatically identify devices.
- Suitable for mobile phones, tablets, consoles, and notebooks.


Specification:

Code	A	B	C
AC plug	US	EU	UK
Input voltage	100~240VAC (1.5A Max.)		
Input frequency	50/60Hz		
USB ports	USB/C type socket x 2, A type socket x1		
Output power	65W Max.		
USB/C output	5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A (65W Max.)		
USB/A output	5V/4.5A, 9V/3A, 12V/2.5A (30W Max.)		
Safety standard	CE /FCC		


SQ80017
Universal USB/A type adaptor

- With safety shutter of universal socket.
- Plug pins can be changed freely according to different area.
- Suitable for mobile phones, digital camera, MP3 player, iPad and iPhone.


Specification:

Input voltage	100~240VAC
Input frequency	50~60 Hz
Output current	2 USB ports: 2.1A 5VDC AC Outlet: 10A 250VAC or 2500W Max.
Withstand voltage	1250VAC
Safety standard	CE
Suitable area	125V: Taiwan, Japan, U.S.A., Canada 250V: Hong Kong, Singapore, Philippines, China, Malaysia, Thailand, E.U. Australia, New Zealand, U.A.E., England, Russia, South america

