

Product Description:

- Tinned ,annealed,stranded or solid copper conductor.
- PVC insulation.
- Rated temperature:105°C .Rated voltage:300volts
- Uniform thickness of wire to ensure easy stripping and cutting.
- Passes UL VW-1&CSA FT1 vertical flamt test
- **Top coated conductor is available**

说明:

- 导体使用单股或绞线裸铜或镀锡铜
- PVC绝缘
- 额定温度：105°C 额定电压：300Volt
- 使用标准厚度，易剥，截断容易。
- 可通过UL VW-1 及 CSA FT1 ， 垂直燃烧测试

Application


- For general purpose internal wiring of electronic and electricalequipment

应用:

- 用于电子及电器设备内部配线

Construction:

构造:

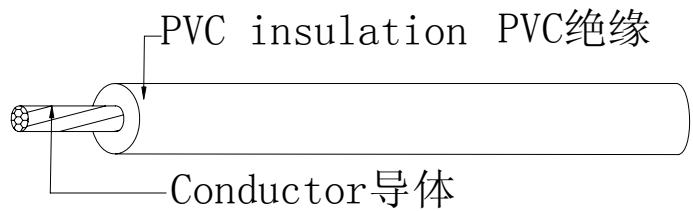

UL Style& CSA Type	Conductor		Insulation Thickness	Overall Diameter	Stand Put-up		Conductor Resistance at 20°C
	AWG	No/mm			mm	mm	
UL1674 CSA AWM I A (Stranded)	30	7/0.102	0.32	0.95	2000	610	381.00
	28	7/0.127	0.32	1.05	2000	610	239.00
	26	7/0.16	0.32	1.15	2000	610	150.00
	24	11/0.16	0.32	1.30	2000	610	94.20
	22	17/0.16	0.32	1.40	2000	610	59.40
	20	21/0.178	0.32	1.60	2000	610	36.70
	18	34/0.178	0.32	1.85	2000	610	23.20
	16	26/0.25	0.32	2.20	2000	610	14.60
UL1674 CSA AWM FT1 I A/B (Top-coated)	28	7/0.127	0.32	1.05	2000	610	248.00
	26	7/0.16	0.32	1.15	2000	610	150.00
	24	7/0.20	0.32	1.30	2000	610	88.70
	22	7/0.254	0.32	1.40	2000	610	54.70
	20	7/0.32	0.32	1.60	2000	610	37.10
UL1674 CSA AWM I A (Solid)	28	1/0.32	0.32	1.00	2000	610	239.00
	26	1/0.404	0.32	1.10	2000	610	143.00
	24	1/0.511	0.32	1.20	2000	610	89.30
	22	1/0.634	0.32	1.30	2000	610	56.40
	20	1/0.813	0.32	1.50	2000	610	35.20