

## CDD系列标准型全电动堆垛车

CDD SERIES STANDARD TYPE FULL-ELECTRIC STACKER

### 主要特点

MAIN CHARACTER

1. 美国CURTIS控制器，质量可靠，性能优异，使整车性能达到最佳状态
2. 进口液压站，低噪音，小振动，密封性能好，确保起升下降平稳可靠
3. 高强度车身设计，特殊压制工艺制造的“C”型钢门架，坚固耐用，使用寿命长
4. 配置大容量牵引电池，电量持久，并选用智能充电器，德国REMA充电插件，充电方便快捷
5. 可选配人性化的护臂结构和折叠式踏板，开闭操作方便

1. Top quality controller system from CURTIS, high reliability, ensures best performance in different states
2. WINNER hydraulic power pack, low noise, few vibration and excellent leak tightness, ensures smooth lifting
3. High-strength frame design and "C" shaped mast, strong and durable, ensures longer service life
4. Configure with 240Ah large capacity battery, intelligent charger, REMA plug from Germany
5. Optional humanized design of handrail and folded pedal, easy operating

### 可选配置 OPTIONAL




F Type Handle



Pedal and Handrail



交流电机  
AC Driving Motor




S12/S15



ST12/ST15



STM12/STM15

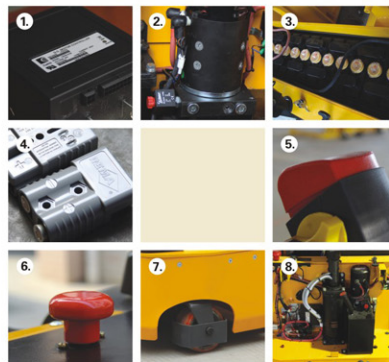

1. 美国CURTIS控制器
  2. WINNER液压泵站
  3. 240Ah大容量蓄电池
  4. 德国REMA充电插件
  5. 紧急反向行驶功能，按下此按钮，车子可反向行驶
  6. 紧急情况下可按下红色断电开关，切断所有电源，车子立即停止
  7. 平衡轮带护罩，保证操作人员安全
  8. 超大维护保养空间，打开后罩后内部部件一览无余
1. CURTIS controller from America
  2. WINNER pump station from Taiwan
  3. 240Ah large capacity battery
  4. REMA plug from Germany
  5. Reverse button, press this button, the truck will travel in reverse
  6. Press the red button in an emergency, cut down all the power, stop the truck
  7. Balance wheel with cover, protect the operator
  8. Large maintenance room

### 技术参数

TECHNICAL DATA

特性 Identification	产品型号 Model	CDD15							
	配置号 Config-code	标准型 Standard type	S12/S15						
	驱动形式 Drive Unit	带踏板扶手 With pedal and handrail	ST12/ST15						
	驾驶方式 Operation type		电动 Electric						
基本尺寸 Dimension	额定载重 Load capacity	Q	kg					1200/1500	
	载荷中心 Load center	C	mm					600	
	总长 Overall length	L	mm					1925	
	总宽 Overall width	b	mm	840	840	840	940	940	940
	总高 Overall height	H2	mm	2090	1800	2025	2125	2225	2325
	起升高度 Lift height	H	mm	1600	2450	2900	3100	3300	3500
	作业时最大高度 Max working height	H1	mm	2244	3094	3544	3744	3944	4144
	货叉最小离地高度 Lowered fork height	h	mm	90					
	货叉尺寸 Fork dimension	L1 x b2 x m	mm	1150 x 160 x 56					
	货叉外宽 Maximum fork width	b1	mm	540/680					
	性能 Performance	轴距 Wheelbase	Y	mm					
转弯半径 Turning radius		Wa	mm						1525
行驶速度 Travel speed		满载 Loaded	Km/h						4.8
		空载 Unloaded	Km/h						6.0
提升速度 Lift speed		满载 Loaded	mm/s						95
		空载 Unloaded	mm/s						144
下降速度 Lowering speed	满载 Loaded	mm/s						150	
	空载 Unloaded	mm/s						120	
电机 Electric Motor	制动方式 Brake type							电磁制动 Electric-magnetic	
	驱动电机功率 Drive motor power	KW						1.2	
	提升电机功率 Lift motor power	KW						2.0	
	蓄电池容量/电压 Battery capacity/voltage	Ah/V						240/24	
重量 Weight	自重(不含电池) Weight without battery	kg						624 680 702 715 724 737	
	电池重量 Battery weight	kg						235	

注：最小堆垛通道Ast的计算请参考附录 Note: Min. stacking aisle width(Ast), please refer to Appendix