

# DC UPS


DC-6024A/6024P/6024D



DC-6024A



DC-6024D

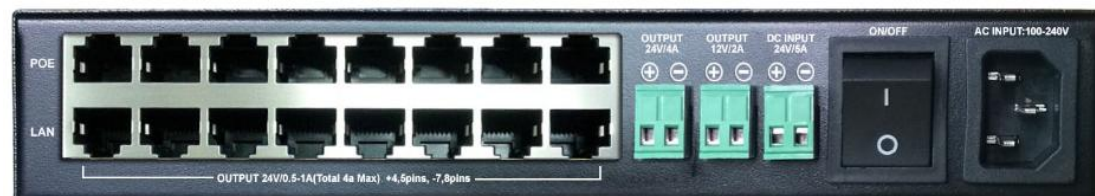

DC-6024P

## Feature

- High capacity lithium batteries, provides long backup to the loads;
- High compatibility, suitable for most digital products in the market;
- Power over Ethernet(POE) can transmit the data and power at the same time to simplify wire set;
- Intelligent circuit design with over-charging, over-discharging and short circuit protections;
- Built-in adapter allows wide AC voltage range (100-240V AC);

## Application

This product can be used as DC UPS to supply uninterruptible power to monitor equipment, it can support 8 CCTVs and 1 DVR to work at the same time. It also can be used as portable power to charge digital devices.

Modem, router, CCTV, DVR, monitor, digital camera,wifi, POE sensor, POE webcam, POE voip, POE internet radio, etc.

## Specifications

MODEL	DC-6024A	DC-6024D	DC-6024P
<b>INPUT</b>			
AC Input voltage	100-240Vac	NO AC Input	100-240Vac
DC Input voltage	12VDC	12VDC	24VDC
<b>OUTPUT</b>			
DC output voltage	12V/8A	12V/8A	24V/4A & 12V/2A
Output power	96W(Max)		120W(Max)
Output Jack	2EDGK 3.81/16pins 2EDGK 5.08/2pins	2EDGK 3.81/16pins 2EDGK 5.08/2pins	RJ45 2*8PCS(+4,5pins, -7,8pins) 2EDGK 5.08/2pins*2
Transfer time	0 ms		
<b>BATTERY</b>			
Battery type	Lithium battery		
QTY.& capacity of battery	3.7V/2200MAH*16(130WH)		3.7V/2200MAH*12(97WH)
<b>CHARGE</b>			
Charge period	Typical: 3-4 Hours		
<b>PHYSICAL</b>			
Unit dimension(mm)	230*155*41		
Net weight (kg)	1.7	1.6	1.5
<b>ENVIRONMENT</b>			
Environment of performance	Temperature 0°C ~ 40°C, Humidity 20% ~ 90%, Noise ≤ 40dB (1m)		