

SWITCH / KEYLOCK SWITCH

S216
dia.19

Key lock switches, SINGLE POLE & DOUBLE POLE,20
Combinations available

[PDF Download](#)[Get Information](#) ZOOM IN

Feature


- | Contact Rating: 4A 125VAC, 2A 250VAC, 4A 28VDC (UL/CUL)
- | Contact Resistance: 10Mini-Ohms Max
- | Insulation Resistance: 500 Meg Ohms Min, (500VDC)
- | Dielectric strength: 1500VAC-1 Minute
- | Lock: Bright nickel plated zinc alloy with nickel facing
- | Tumbler mechanism: 4-disc tumbler cylinder
- | Keys: Brass with code no.
- | Contacts:Golden plated cu (Q contact material)
- | Terminals:Golden plated cu (Q contact material)
- | All keyed alike or 20 combinations standard; 20 combinations available

Specification

● Detent position
 ● Detent and Pull position

Key Way	Pos. Angle	No.	Pole	POS.1	POS.2	POS.3
	45 degrees	A	SP	(8,1)	(1, 2)	(2, 3)
		B	DP	(8,1) (4, 5)	(1, 2) (5, 6)	(2, 3) (6, 7)
	45 degrees	C	SP	(8,1)	(1, 2)	(2, 3)
		D	DP	(8,1) (4, 5)	(1, 2) (5, 6)	(2, 3) (6, 7)
	45 degrees	E	SP	(8,1)	(1, 2)	(2, 3)
		F	DP	(8,1) (4, 5)	(1, 2) (5, 6)	(2, 3) (6, 7)
	45 degrees	G	SP	(8,1)	(1, 2)	(7, 8)
		H	DP	(8,1) (4, 5)	(1, 2) (5, 6)	(7, 8) (3, 4)
	45 degrees	I	SP	(8,1)	(1, 2)	(7, 8)
		J	DP	(8,1) (4, 5)	(1, 2) (5, 6)	(7, 8) (3, 4)
	90 degrees	N	SP	(8,1)	(1, 3)	
		O	DP	(8,1) (4, 5)	(1, 3) (5, 7)	
	90 degrees	P	SP	(8,1)	(1, 3)	
		Q	DP	(8,1) (4, 5)	(1, 3) (5, 7)	
	90 degrees	R	SP	(8,1)	(1, 3)	
		S	DP	(8,1) (4, 5)	(1, 3) (5, 7)	
	90 degrees	BI	SP	(7, 1)	(1, 3)	(6, 7)
		CI	SP	(7, 1)	(1, 3)	(6, 7)
	90 degrees	DI	SP	(7, 1)	(1, 3)	(6, 7)

Ex. S216N, S216R

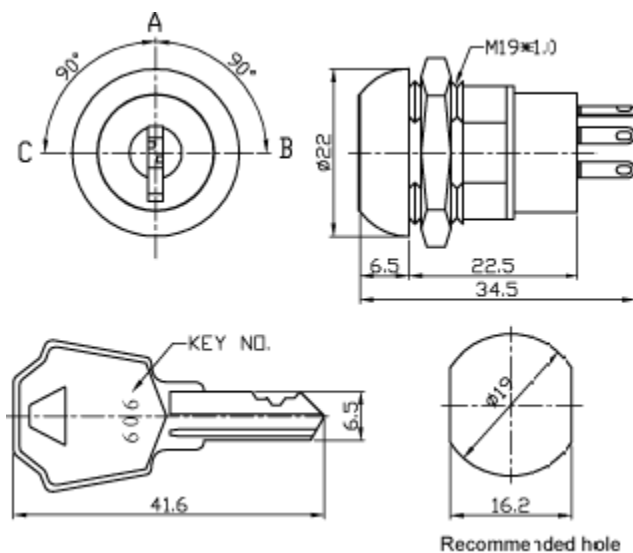

Start Print

Canal Components Inc. Tel:+886-2-29161263 Fax:+886-2-29117574
 Copyright ©2009 Canal Components Inc.. All rights reserved.