



www.eng.com.tw

AC-DC 3W


3A-031WUXX

Features:

- Universal AC Input 90 ~ 264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- Safety: UL, cUL, TUV, CB, CE standard



Dimension:

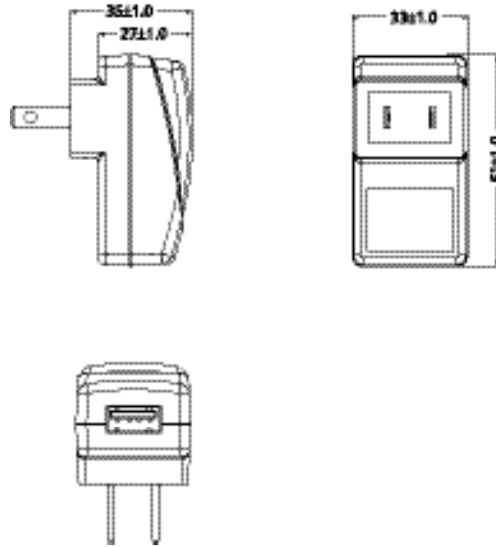

Model No.	Output		Additional Safety
3A-031WUXX	3.3V-5V	0.5A	UL, cUL, FCC

Specification:

Input	Voltage	AC 90V ~ 264V Universal full range
	Frequency	47 - 63Hz
	Current	100mA
	Leakage Current	<0.25mA
Others	Start up time	<1000mS @ Minimum AC input
	Rise time	<100mS
	Hold up time	> 20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40°C; Storage: -10 ~ +75°C
	Humidity	Operating: 20% ~ 85%; Storage: -10% ~ 95% (Non Conversing)
M.T.B.F	50k Hours	
Safety	UL 60950, CSA C22.2 No.60950, EN 60950, IEC 60950	
EMC	EMI	FCC CFR 47 PART 15, EN55022, EN61000-3
	EMS	EN50024(EN61204-3), EN61000-4

英格爾科技股份有限公司 台灣省桃園縣龜山鄉民生北路 1段536號5樓
 ENG ELECTRIC CO., LTD. 5F, No.536, Sec.1. Min Sheng N, Rd.,
 Kweishan Hsiang, Taoyuan Hsien, Taiwan

TEL : 886-3-2121122 FAX : 886-3-2121570 E-mail : eng@eng.com.tw http : // www.eng.com.tw

