


## HSH-E Series Lever Block Specifications


- Germany Model
- Load limiter is available at extra cost
- High quality materials ensure light weight without infringing reliability
- Low weight, small mounting sizes and small lever forces at full load
- Premium grade alloy load chain
- Drop-forged and expertly heat treated hooks for great strength and long wearing
- Capacity ranges from 0.75t to 9t
- Different lifting length is available at requirement

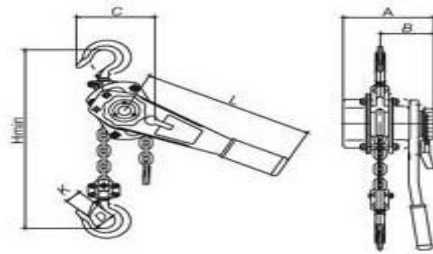

Model		HSH-0.75A	HSH-1A	HSH-1.5A	HSH-2A	HSH-3A	HSH-6A	HSH-9A
Capacity	tons	0.75	1	1.5	2	3	6	9
Standard lift	m	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Running test load	KN	11	15	22.5	30	37.5	75	112.5
Effort required to lift rated load	N	140	140	220	240	320	340	360
Strands of load chain		1	1	1	1	1	2	3
Diameter of load chain	mm	6	6	7.1	8	10	10	10
Dimensions (mm)	A	148	148	172	172	200	200	200
	B	90	90	98	98	115	115	115
	C	136	136	160	160	180	235	330
	D	40	40	44	46	50	64	85
	H	320	320	380	380	480	600	700
	L	280	280	410	410	410	410	410
	K	27	27	34	36	38	48	57
Net weight	kg	7	7	10	11.8	17.5	28.5	45
Packing measurement	cm	33x16x13	33x16x13	43x18.5x16	44x19x17	50x20x18	53x21x21	82x32x21.5
Extra weight per metre of extra lift	kg	0.8	0.8	1.1	1.4	2.2	4.4	6.6

## HSH-VT Series Lever Block Specifications

- Japan Model
- Compact design and robust, deep drawn, stamped steel construction
- High quality materials ensure light weight without infringing reliability
- Low weight, small mounting sizes and small lever forces at full load
- Hand lever operates with little effort due to optional gear ratio
- Premium grade alloy load chain
- Drop-forged and expertly heat treated hooks for great strength and long wearing
- Capacity ranges from 0.75t to 9t
- Different lifting length is available at requirement

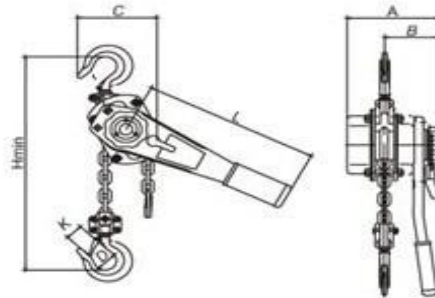

Model		HSH-2.5	HSH-5	HSH-7.5	HSH-10	HSH-15	HSH-20	HSH-30	HSH-60	HSH-90
Capacity	tons	0.25	0.5	0.75	1	1.5	2	3	6	9
Standard lift	m	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Running test load	KN	3.75	7.5	11.25	15	22.5	30	45	90	112.5
Effort required to lift rated load	N	250	340	140	185	234	251	362	362	360
Strands of load chain		1	1	1	1	1	1	1	2	3
Diameter of load chain	mm	4	5	6	6	7.1	8	10	10	10
Dimensions (mm)	A	92	105	152	152	175	175	195	195	215
	B	72	78	95	95	110	105	110	115	130
	C	85	80	128	128	148	160	181	232	330
	D	30	35	36	36	43	46	50	65	85
	H	230	260	295	295	335	385	450	542	700
	L	160	300	256	256	368	368	368	368	410
	K	25	25	26	26	33	36	37	50	58
Net weight	kg	1.8	4	7	7	11	15.5	20	28	47
Packing measurement	cm	20x7.5x9	33x12x9	33x16x13	33x16x13	43x18.5x16	44x19x17	50x20x18	53x21x21	82x32x21.5
Extra weight per metre of extra lift	kg	0.34	0.54	0.8	0.8	1.1	1.4	2.2	4.4	6.6