

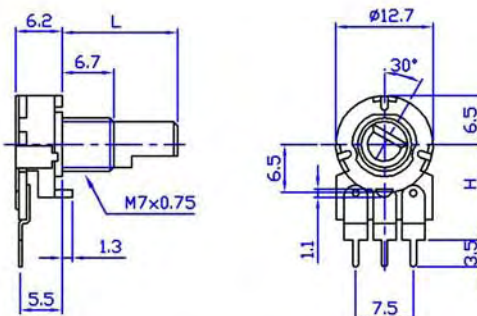

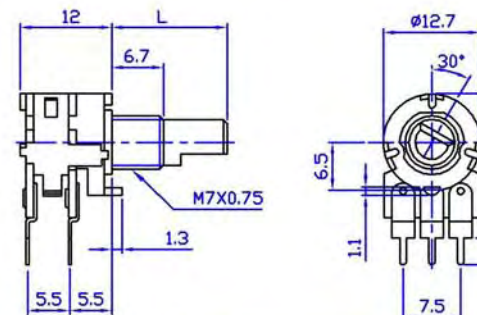

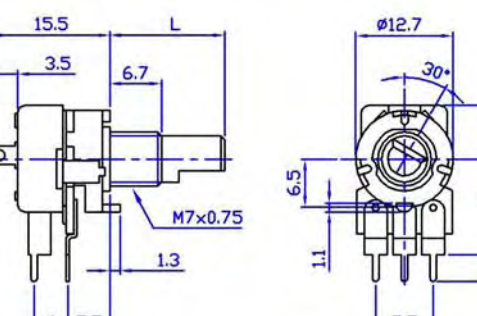

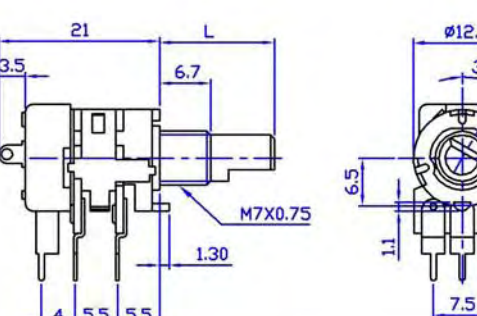



12MM 标准回轉型電位器

12mm SIZE STANDARD ROTARY POTENTIOMETERS

Model

Dimensions

<p>R12313NO R12314NO</p>	 <p style="text-align: center;">L 15/20/25/30</p>	 <p style="text-align: center;">Mounting hole detail</p> <table border="1" data-bbox="1149 582 1340 672"> <thead> <tr> <th>Product code</th> <th>H</th> </tr> </thead> <tbody> <tr> <td>R12313NO</td> <td>10</td> </tr> <tr> <td>R12314NO</td> <td>12.5</td> </tr> </tbody> </table>	Product code	H	R12313NO	10	R12314NO	12.5
Product code	H							
R12313NO	10							
R12314NO	12.5							
<p>R12313GO R12314GO</p>	 <p style="text-align: center;">L 15/20/25/30</p>	 <p style="text-align: center;">Mounting hole detail</p> <table border="1" data-bbox="1149 1030 1340 1120"> <thead> <tr> <th>Product code</th> <th>H</th> </tr> </thead> <tbody> <tr> <td>R12313GO</td> <td>10</td> </tr> <tr> <td>R12314GO</td> <td>12.5</td> </tr> </tbody> </table>	Product code	H	R12313GO	10	R12314GO	12.5
Product code	H							
R12313GO	10							
R12314GO	12.5							
<p>R12313NS R12314NS</p>	 <p style="text-align: center;">L 15/20/25/30</p>	 <p style="text-align: center;">Mounting hole detail</p> <table border="1" data-bbox="1149 1478 1340 1568"> <thead> <tr> <th>Product code</th> <th>H</th> </tr> </thead> <tbody> <tr> <td>R12313NS</td> <td>10</td> </tr> <tr> <td>R12314NS</td> <td>12.5</td> </tr> </tbody> </table>	Product code	H	R12313NS	10	R12314NS	12.5
Product code	H							
R12313NS	10							
R12314NS	12.5							
<p>R12313GS R12314GS</p>	 <p style="text-align: center;">L 15/20/25/30</p>	 <p style="text-align: center;">Mounting hole detail</p> <table border="1" data-bbox="1149 1926 1340 2016"> <thead> <tr> <th>Product code</th> <th>H</th> </tr> </thead> <tbody> <tr> <td>R12313GS</td> <td>10</td> </tr> <tr> <td>R12314GS</td> <td>12.5</td> </tr> </tbody> </table>	Product code	H	R12313GS	10	R12314GS	12.5
Product code	H							
R12313GS	10							
R12314GS	12.5							

电位器规格书

SPECIFICATIONS

适用型号 : R123、126 单联带开关系列
 APPLICABLE MODELS: R123、126 Single Unit With Switch Series

一 构造 CONSTRUCTION

形状,寸法,依照图面规定

外观 各部应良好无锈蚀、裂痕、电镀不良现象
 APPEARANCE: EVRY PART SHOULD BE FINISHED NOT TO EXIST RUST
 FLAW CRACK AND PLATING

二 机械性能 MECANICAL STRUCTURE

ITEMS	SPECIFICATION
全回转角度 Total rotational angle	300° ±5°
转动力矩 Rotational torque	20~250gf.cm
回转止动强度 Rotational stopper strength	3Kgf.cm
轴押引强度 Push-pull strength	8Kgf
轴摇晃度 Shaft wobble	0.4xL/25mm p-p max.

三 电气特性 ELECTRICAL CHARACTERISTICS

ITEMS	SPECIFICATION
全阻抗值 Total resistance	_____ Ω
全阻抗值容许差 Total resistance tolerance	±20%
残留电阻值 Residual resistance	R≤10K Ω 10 Ω 10K<R<250K Ω 20 Ω R≥250K 0.1% max. of total resistance
抵抗变化特性 Total resistance tolerance	<input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D <input type="checkbox"/> W <input type="checkbox"/> _____
定格电力 Power rating	B: 0.08W A、C: 0.04W
最高使用电压 Maximum operating voltage	30V AC、DC
滑动杂音 Slider noise	未滿 47mv Less than 47mv
绝缘抵抗 Insulation resistance	100M Ω min. at 250V DC
耐电压 Voltage proof	1 minute at 250V AC
回转寿命 Rotational life	10,000 cycles
开关的性能(switch characteristics)	
开关接触电阻 Switch contact resistance	50m Ω MAX.
开关定格电力 Switch Ratings power	12V DC 1A
开关寿命 Switch life	10,000 cycles
开关工作角度 Switch working angle	50° ±10°
开关工作力矩 Switch working torque	150~450gf.cm
开关回路 Switch circuit	S.P.S.T

东莞市长泰尔电子有限公司
DONG GUAN CHANG TAI ER ELECTRONICS CO.,LTD

制作 Approved	审核 Examine	核准 Approve