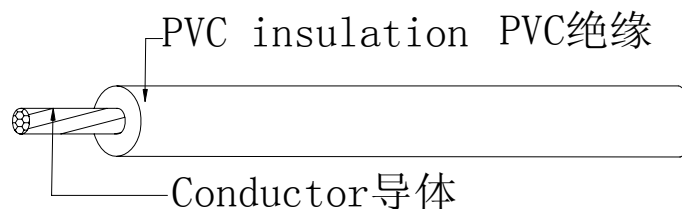


Product Description:

- Tinned, annealed, stranded or solid copper conductor.
- Color-coded PVC insulation.
- Rated temperature: 80°C. Rated voltage: 600volts
- Uniform thickness of wire to ensure easy stripping and cutting.
- Passes UL VW-1&CSA FT1 vertical flame test
- Top coated conductor is available

Applications:

- For general purpose internal wiring of electronic and electrical equipment

Construction:

UL FILE NO.: E214500

UL Style& CSA Type	Conductor		Insulation Thickness mm	Overall Diameter mm	Standard Put-up		Conductor Resistance at 20°C Ω/KM
	AWG	No/mm			Ft/coil	M/Coil	
UL1013 CSA (Stranded)	30	7/0.102	0.76	1.90	2000	610	381.00
	28	7/0.127	0.76	2.00	2000	610	239.00
	26	7/0.16	0.76	2.10	2000	610	150.00
	24	11/0.16	0.76	2.20	2000	610	94.20
	22	17/0.16	0.76	2.40	2000	610	59.40
	20	21/0.178	0.76	2.60	2000	610	36.70
	18	34/0.178	0.76	2.80	2000	610	23.20
	16	26/0.25	0.76	3.10	1000	305	14.60
	14	41/0.25	0.76	3.50	1000	305	8.96
	12	65/0.25	0.76	4.10	1000	305	5.64
UL1013 CSA (Top-coated)	10	105/0.25	0.76	5.10	1000	305	3.55
	26	7/0.16	0.76	2.10	2000	610	140.00
	24	7/0.20	0.76	2.20	2000	610	88.70
	22	7/0.25	0.76	2.40	2000	610	54.70
	20	7/0.32	0.76	2.60	2000	610	37.10
	18	7/0.4	0.76	2.80	2000	610	23.70
UL1013 CSA (Solid)	16	7/0.488	0.76	3.10	1000	305	14.20
	28	1/0.32	0.76	1.90	2000	610	227.00
	26	1/0.404	0.76	2.00	2000	610	143.00
	24	1/0.511	0.76	2.20	2000	610	89.30
	22	1/0.634	0.76	2.30	2000	610	56.40
	20	1/0.813	0.76	2.50	2000	610	35.20
	18	1/1.024	0.76	2.80	2000	610	22.20