


Terminal Blocks, PA & Steel Type

- Available in polyamide 66, UL 94V-2 or 94V-0 flame-retardant shell respectively rated at T110 or T140 (IEC), 105°C/221°F (UL).
- Metal parts feature steel screws and zinc-plated steel contacts provided with or without brass strips.
- Recessed screws and tubular contacts provide added safety and help prevent short circuits.
- Integrated spring steel wire protectors prevent twisting and breakage of stranded conductors.
- Modular 12-circuit design can be cut into desired number of poles.
- Certified to IEC/EN 60998 and Recognized to UL 1059.

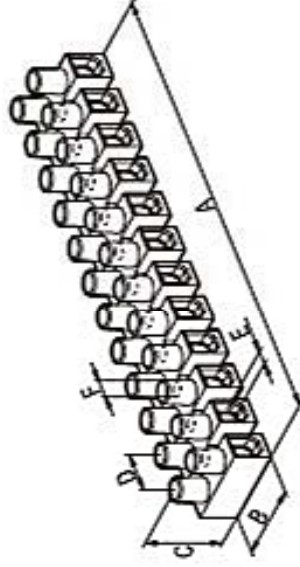

Cat. No.	Dimensions (mm/inches)						Screw
	Unit	A	B	C	D	∅E	
PA7	mm	96,20	17,00	14,50	8,20	2,90	2,80
PA7DS	in.	3.787	0.669	0.571	0.323	0.114	0.130
PA9	mm	116,8	20,20	16,70	10,00	3,60	3,20
PA9DS	in.	4.598	0.795	0.658	0.394	0.142	0.126

Cat. No.	Wire Protectors	Color	No. of Poles	Electrical Ratings & Wire Range	Approvals	Packing
PA7	Without	Nature	12	17,5A, 450V, T110°C/T140°C 0,75-1,5 mm ² , Rigid/Flexible	CE, FI, cULus	Bag of 50 Carton of 500
PA7DS	With	Nature	12	20A, 300V, 85°C (185°F) 22-12 AWG, Sol/Str Cu	cULus	Bag of 50 Carton of 500
PA9	Without	Nature	12	24A, 450V, T110°C/T140°C 1,0-2,5 mm ² , Rigid/Flexible	CE, FI, cULus	Bag of 50 Carton of 500
PA9DS	With	Nature	12	30A, 600V, 105°C (221°F) 22-12 AWG, Sol/Str Cu	cULus	Bag of 50 Carton of 500