


Diaphragm Valve

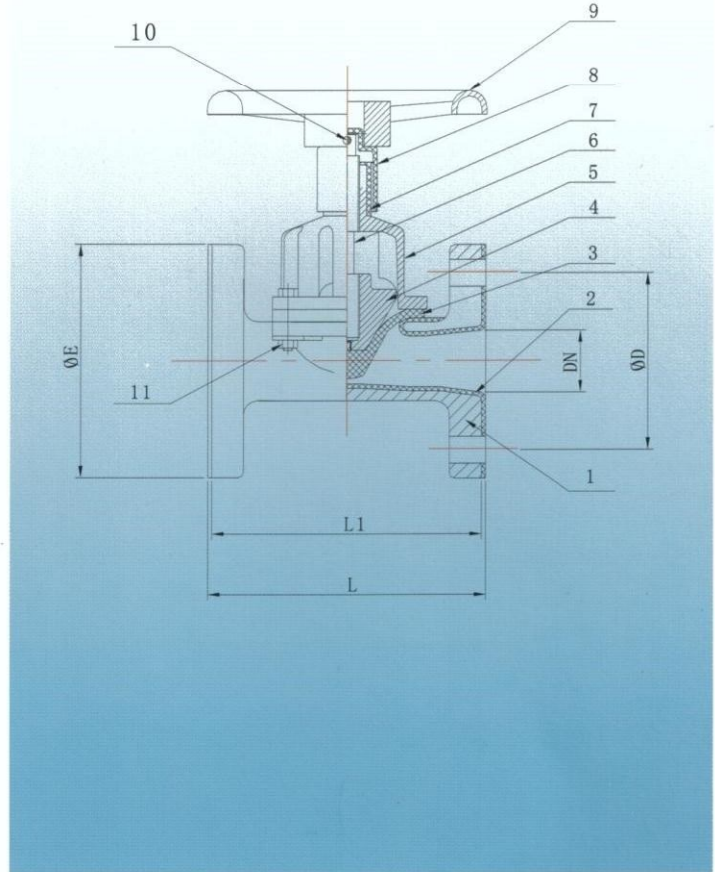

Description:

1. Working pressure:
 DN50-DN125: 1.0Mpa
 DN150-DN200: 0.6Mpa
 DN250-DN300: 0.4Mpa
2. Working temperature:
 NR: -20°C~+60°C
3. Face to face: EN588-1
4. Flange standards: EN1092-2, BS4504 etc.
5. Testing: DIN3230, API598
6. Medium: Cement, Clay, Cinder, Granular fertilizer and so on solid fluid, Fresh Water, Sea water, inorganic acid and alkaline liquid etc.

Material List:

NO.	Part	Material
1	Body	GG25
2	Lining	NR
3	Diaphragm	NR
4	Disc	GG25
5	Bonnet	GG25
6	Shaft	Steel
7	Sleeve	ABS
8	Sleeve	ABS
9	Handle	GGG40
10	Pin	Steel
11	Bolt	Steel

Dimension:

DN(mm)	50	65	80	100	125	150	200	250	300	
L (mm)	194	216	258	309	362	412	527	640	755	
L1(mm)	188	222	252	301	354	404	517	630	745	
ΦE (mm)	165	185	198	220	250	283	335	395	445	
ΦD (mm) (EN1092-2)	PN10	Φ125	Φ145	Φ160	Φ180	Φ210	Φ240	Φ295	Φ350	Φ400
	PN16								Φ355	Φ410