


AWWA Resilient Seated Gate Valves NRS/OS&Y Flanged Ends 200/250PSI

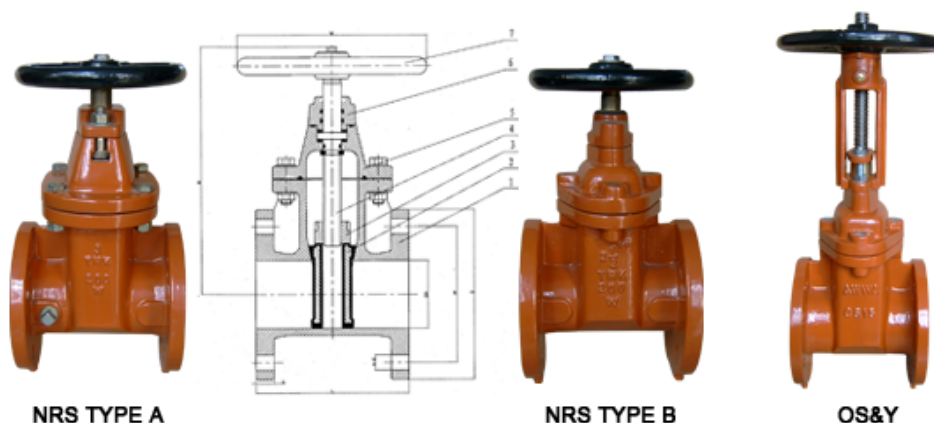

DESCRIPTION

- 1.Design confirms to:AWWA C509/C515
- 2.Flanged confirms to: ANSI B16.10
- 3.Test & Inspection: AWWA C509/C515
- 4.Suitable medium: water and neutral liquid
- 5.Working temperature: NBR≤80℃, EPDM≤120℃
- 6.Operator: handwheel, nut, extension stem, gear operator

MATERIAL LIST

No.	PART	MATERIAL
1	BODY	DI ASTM A536
2	WEDGE	DI A536 NBR/EPDM
3	STEM NUT	BRONZE C83600
4	STEM	420/304
5	BONNET	DI ASTM A536
6	GLAND	DI A536/BRASS
7	HANDWHEEL	DI ASTM A536

DIMENSIONS(mm)

DN	L	H	M	W	D	b	n-d
1.5"	165	260	98.5	160	127	15	4-16
2"	178	270	120.5	180	152	16	4-19
2.5"	190	283	139.5	180	178	18	4-19
3"	203	311	152.5	200	191	19	4-19
4"	229	352	190.5	250	229	24	8-19
5"	254	435	216	280	254	24	8-22
6"	267	485	241.5	320	279	25.4	8-22
8"	292	520	298.5	350	343	28.6	8-22
10"	330	632	362	400	406	30.2	12-25
12"	356	745	432	450	483	31.8	12-25
14"	381	835	476	500	533	35	12-29
16"	406	953	539.5	550	597	36.5	16-29
18"	432	1050	578	600	635	40	16-32
20"	457	1160	635	650	699	43	20-32
24"	508	1395	749.5	750	813	47.7	20-35
30"	610						
36"	711						