

2.50mm (.098") Power Connectors

Specifications

- Voltage Rating : 250V AC/DC
- Current Rating : 3A AC/DC
- Withstanding Voltage : 800V AC/minute
- Insulation Resistance : 1000MΩ min.
- Temperature Range : -25°C to + 85°C
- Contact Resistance : 20mΩ max.

Features:

■ HOUSING

Part No. : JS-6503

JS-6504

Poles : 2 - 18

Material : Nylon 66 UL94V-0

Q'ty : 1,000 pcs/Bag

■ TERMINAL

Part No. : JS-6503-T

JS-6504-T

Applicable Wires : AWG# 22 - 28

Material : Brass

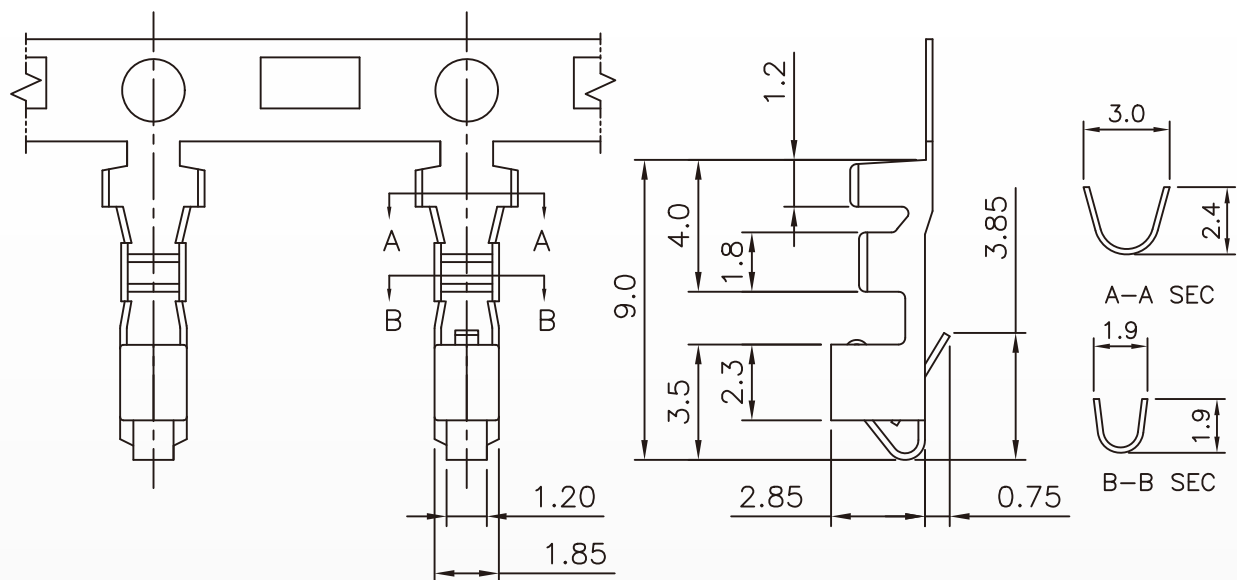
Finish : Tin Plated

Thickness : 0.2mm


Q'ty : 7,000 pcs/Reel

2.50mm (.098") Power Connectors









Terminal JS-6503-T



Terminal JS-6504-T

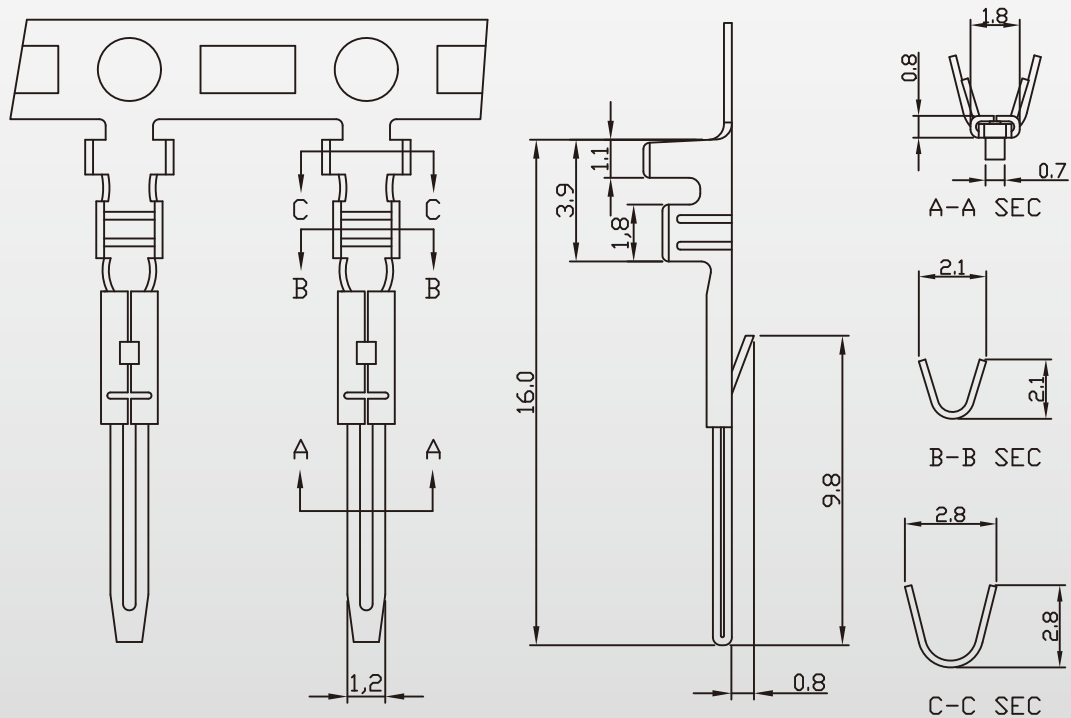

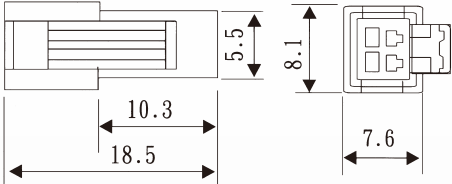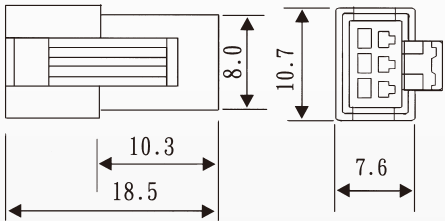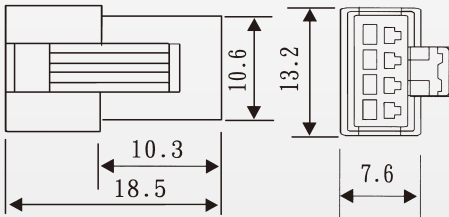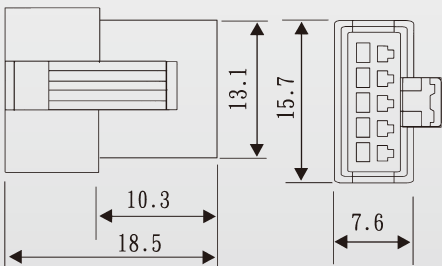2.50mm (.098") Power Connectors

Dimension Information		
Poles	Receptacle	Plug
2	JS-6504-02 	JS-6503-02 
3	JS-6504-03 	JS-6503-03 
4	JS-6504-04 	JS-6503-04 
5	JS-6504-05 	JS-6503-05 

2.50mm (.098") Power Connectors

Dimension Information		
Poles	Receptacle	Plug
6	JS-6504-06	JS-6503-06
7	JS-6504-07	JS-6503-07
8	JS-6504-08	JS-6503-08
9	JS-6504-09	JS-6503-09

2.50mm (.098") Power Connectors

Dimension Information		
Poles	Receptacle	Plug
10	JS-6504-10 	JS-6503-10
11	JS-6504-11 	JS-6503-11
12	JS-6504-12 	JS-6503-12
16	JS-6504-16 	JS-6503-16
18	JS-6504-18 	JS-6503-18