

Product Description:

- Tinned ,annealed, stranded or solid copper conductor.
- PE FR-PE insulation
- FR-PE jacketed
- Tinned or bare copper wire spiral or braid shield
- Rated temperature:80°C.Rated voltage:300Volts
- Passes UL VW-1 vertical flame test

说明:

1股或绞线裸铜或镀锡铜。

IFR-PE,PE绝缘

- FR-PE被覆

锡铜丝，缠绕或编织屏蔽

：80°C额定电压：300V

L VW-1，垂直燃烧测试

Applications:


- For internal wiring of computer, audio&video equipment.

应用:

- 用于电脑及视听设备内部连线。

Construction:

构造:

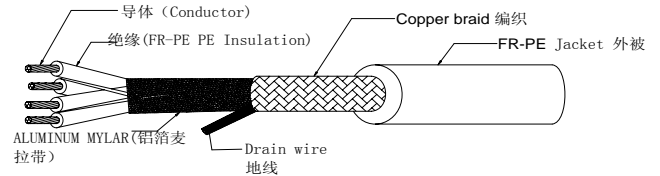

UL Style Type	Cores	Conductor		Insulation Thickness mm	Nom.Dia mm	Shield Coverage %	Jacket Thickness mm	Overall Diameter mm	Conductor Resistance at 20°C Ω/KM
		AWG	No/mm						
UL20854 (Stranded)	2C	30	7/0.100	0.23	0.80	≥65	1.02	3.7	381.00
		28	7/0.127	0.23	0.90	≥65	1.02	3.9	239.00
		26	7/0.16	0.23	1.00	≥65	1.02	4.1	150.00
		24	11/0.16	0.23	1.10	≥65	1.02	4.3	94.20
		22	17/0.16	0.23	1.30	≥65	1.02	4.7	59.40
		20	21/0.178	0.23	1.50	≥65	1.02	5.1	36.70
		18	34/0.178	0.23	1.80	≥65	1.02	5.7	23.20
		16	26/0.25	0.23	2.10	≥65	1.02	6.3	14.60
UL20854 (Stranded)	3C	30	7/0.100	0.23	0.80	≥65	1.02	3.9	381.00
		28	7/0.127	0.23	0.90	≥65	1.02	4.0	239.00
		26	7/0.16	0.23	1.00	0.65	1.02	4.3	150.00
		24	11/0.16	0.23	1.10	≥65	1.02	4.5	94.20
		22	17/0.16	0.23	1.30	≥65	1.02	4.9	59.40
		20	21/0.178	0.23	1.50	≥65	1.02	5.3	36.70
		18	34/0.178	0.23	1.80	≥65	1.02	6.0	23.20
UL20854 (Stranded)	4C	30	7/0.100	0.23	0.80	≥65	1.02	5.3	381.00
		28	7/0.127	0.23	0.90	≥65	1.02	5.6	239.00
		26	7/0.16	0.23	1.00	≥65	1.02	5.8	150.00
		24	11/0.16	0.23	1.10	≥65	1.02	6.0	94.20
		22	17/0.16	0.23	1.30	≥65	1.02	6.5	59.40
		20	21/0.178	0.23	1.50	≥65	1.02	7.0	36.70
UL20854 (Stranded)	5C	30	7/0.100	0.23	0.80	≥65	1.02	5.5	381.00
		28	7/0.127	0.23	0.90	≥65	1.02	5.8	239.00
		26	7/0.16	0.23	1.00	≥65	1.02	6.1	150.00
		24	11/0.16	0.23	1.10	≥65	1.02	6.3	94.20
		22	17/0.16	0.23	1.30	≥65	1.02	6.9	59.40
UL20854 (Stranded)	6C	30	7/0.100	0.23	0.80	≥65	1.02	5.8	381.00
		28	7/0.127	0.23	0.90	≥65	1.02	6.3	239.00
		26	7/0.16	0.23	1.00	≥65	1.02	6.4	150.00
		24	11/0.16	0.23	1.10	≥65	1.02	6.6	94.20