

# 21.5" Full HD Video


## Full HD Professional Video TFT LCD MONITOR



### FEATURES

- Special Video Processor.
- NTSC/PAL Auto Switch.
- Aluminum panel Frame. Metal Case.
- VESA Standard Bracket.
- Automatic Color Control and Color Killer.
- PIP Control Function (PC/Video).
- Black Level Extension.
- 3D De-interlace Technology.
- 3D Comb Filter Technology.
- 1080P Supported.
- Friendly OSD Menu.
- Sharpness Enhancement.
- Screen protector(Anti-blur/ Image auto move).
- Shortly Response Time Between Source Switching.
- With M-Star IC.
- Monitor Identification Setting Function.
- 3-D Video Noise Reduction.
- 10 Bit Display Color Processing.

### CONNECTORS



### SPECIFICATIONS


MODEL	CH-L215AV-HMDEL
LCD Panel	21.5" Wide Screen
Viewable Area (H/V-mm)	476.64 x268.11
Profile Ratio	16:9
Max. Resolution (H/V)	1920 x 1080 <b>Full HD</b>
Display Colors	16.7M
Brightness (nit)	25(LED BL)
Contrast Ratio	5000:1
Response Time(Tr / Tf-ms)	3.8/1.2
View Angle (U/D/L/R)	89/89/89/89
Input Video Signal	2 x (Composite Video), 1.0-Vp-p,75Ω. 1 x (S-Video): Y(1.0-Vp-p), C(0.285-Vp-p), 1 x Full HD In, 1 x DVI-D In, 1 x Analog RGB, 1 x USB
Input Audio Signal	2 x Audio R/L 50~100m Vp-p, 1 x PC Audio
Bracket	75/100
Audio In	2x / 2x (RCA)
Audio Output	1x built-in speaker (2 watt)
Environment	Operating:(0 C~50 C)/Humidity:10%~85%(32 F~122 F),Storage: (-20 C~60 C)/Homidity: 10%~85%(-4 F~140 F)
Power Supply	AC 90~264 VAC 60/50HZ,Global Switching Power Adapter(12VDC/5A)
Power Consumption	22W
Net Dimension (W x H x D)	532.2x 323.3 x 56.7 mm(20.9 x 12.7x 2.23Inch)
Net Weight	5.4 kgs (11.9lbs)

### INTERFACE

#### 3D De-interlace Technology.



#### Non 3D De-interlace Technology.

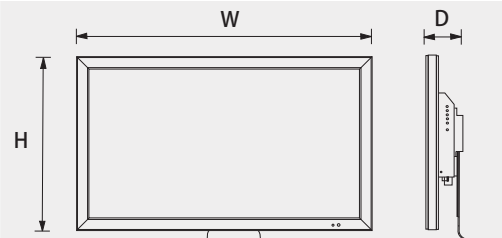

(STANDARD)