



Product Description:

- Tinned, annealed, stranded or solid copper conductor.
- TPE insulation
- TPE jacketed
- Tinned or bare copper wire spiral or braid shield
- Rated temperature: 80°C/90°C. Rated voltage: 30 150 300 600Volts
- Passes UL VW-1&CUL FT1 vertical flame test

说明:

- 导体使用单股或绞线裸铜或镀锡铜。
- TPE绝缘
- TPE被覆
- 裸铜或镀锡铜丝，缠绕或编织屏蔽
- 额定温度：80，90℃ 额定电压：30 150 300 600Volts
- 可通过UL VW-1 及 CUL FT1 ，垂直燃烧测试

Applications:


Internal wiring or external inter-connection of electronic equipment (such as desk-type calculators, dictating machines, or X-ray equipment).

应用:

内部和外部电子设备间连接（如桌面型计算器口授机或X射线设备。

Construction:

构造:

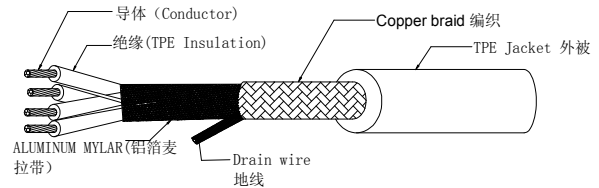

UL Style& CUL Type	Cores	Conductor		Insulation Thickness	Nom. Dia	Shield Coverage	Jacket Thickness	Overall Diameter	Conductor Resistance at 20°C
		AWG	No/mm						
UL20626 CUL (Stranded)	2C	20	21/0.178	0.76	2.50	>=65	0.76	7.40	36.70
		18	34/0.178	0.76	2.80	>=65	0.76	7.80	23.20
		16	26/0.25	0.76	3.10	>=65	0.76	8.40	14.60
		14	41/0.25	0.76	3.50	>=65	0.76	9.70	8.96
UL20626 CUL (Stranded)	3C	20	21/0.178	0.76	2.50	>=65	0.76	7.80	36.70
		18	34/0.178	0.76	2.80	>=65	0.76	8.40	23.20
		16	26/0.25	0.76	3.10	>=65	0.76	9.00	14.60
		14	41/0.25	0.76	3.50	>=65	0.76	10.00	8.96
UL20626 CUL (Stranded)	4C	20	21/0.178	0.76	2.50	>=65	0.76	8.40	36.70
		18	34/0.178	0.76	2.80	>=65	0.76	9.40	23.20
		16	26/0.25	0.76	3.10	>=65	0.76	10.00	14.60
		14	41/0.25	0.76	3.50	>=65	0.76	11.20	8.96
UL20626 CUL (Stranded)	5C	20	21/0.178	0.76	2.50	>=65	0.76	9.00	36.70
		18	34/0.178	0.76	2.80	>=65	0.76	10.20	23.20
		16	26/0.25	0.76	3.10	>=65	0.76	11.20	14.60
		14	41/0.25	0.76	3.50	>=65	0.76	12.20	8.96