




Quartz Crystal Unit (1.6 x 1.2 x 0.3mm)

● Dimension and Recommended Soldering Pattern

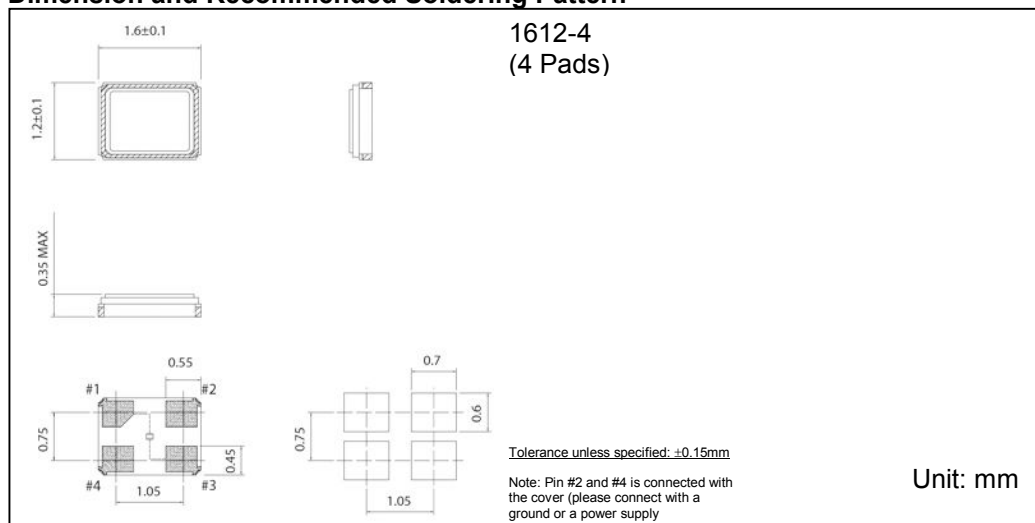

RoHS Compliant
Directive 2002/95/EC

REACH Compliant
(15 SVHCs)
Regulation (EC) No.
1907/2006

TS16949:2002
Certified

● Electrical Specifications

Holder type		1612-4 (1.6 x 1.2 x 0.3mm, surface-mounted, four pads)
Frequency range	Fo	26.000MHz to 60.000MHz
Frequency tolerance (at 25°C)	ΔF	±10ppm to ±100ppm
Frequency drift	Tc	±10ppm to ±100ppm
Operating temperature range	T0	-10°C ~ +60°C to -40°C ~ +85°C
Storage temperature range	TS	-40°C ~ +85°C
Aging (at 25°C)		±5ppm / year max.
Shunt capacitance	C0	7pF max.
Drive level	DL	10μW (typical)
Insulation resistance	Ri	500MΩ min. at DC100V
Load capacitance	CL	Suggested by customer

- The above information is for reference only. For other frequencies or specifications, please consult with our sales representatives for details.

● Equivalent Series Resistance and Mode of Operation

Frequency range	Equivalent series resistance	Mode of operation
26.000MHz to 31.999MHz	150Ω max.	Fundamental
32.000MHz to 37.999MHz	100Ω max.	Fundamental
38.000MHz to 60.000MHz	80Ω max.	Fundamental

- The above information is for reference only. For other frequencies or specifications, please