

8" Rack Mountable


Video LCD MONITOR

FEATURES

- Special Video Processor.
- Fully Support NTSC/PAL.
- 2/4 H Adaptive Comb Filter for Y/C Separation.
- Image Enhancement With 2D Peaking and CTI.
- Automatic Color Control and Color Killer.
- High Quality Horizontal and Vertical Scanning with 2D De-interlace for Display.
- Friendly OSD Function Controls.
- Remote Control is Supported (Option).
- 2 Composite Video Input and Output, One S-Video input and output, PC, D-Sub Input (Option).
- Auto Power On.
- Audio In/Out (Option).
- Tilt Angle Adjustable.



CONNECTORS

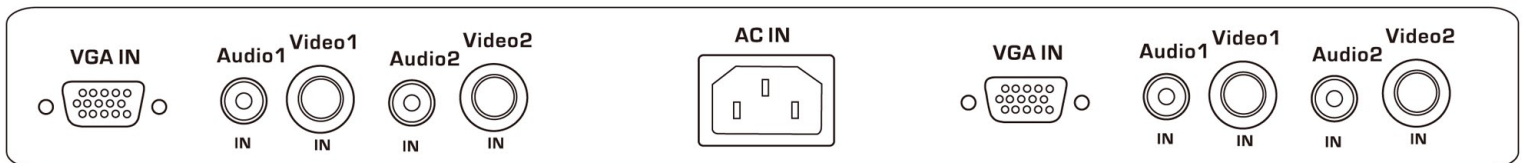

SPECIFICATIONS

MODEL	CH-LCD80R	CH-LCD80RH
LCD Panel	8.0	
Display Pixels	800 x 600	
Active Area(mm)	162 x 121.5	
Profile Ratio / Bac	4:3/LED	
Display Colors	262k	
Brightness(nit)	250nit	500nit
Contrast Ratio	300:1	
Viewing Angle(U/D/L/R)	50/70/70/70	
Response Time(Tr / Tf-ms)	12/18ms	
Input Signal(PC)	SVGA/VGA	
Input Signal	Video: 2 CH Composite Video / PC: Analog RGB S-Video: Option / Audio: 2CH 50~100mVp-p	
In/Out Impedance	75Ω	
Operation System	NTSC/PAL	
Input/Output Connector	Video: 2CH BNC Input / Audio: 2CH RCA Input PC: 15 Pin D-Sub connector. / S-Video: Option	
Power Source	AC90~260VAC 50H/60HZ	
Power Consumption	6W x 2	7W x 2
Bracket	19"Rack Mount Standard	
Operation Tmp.	-10°C~50°C(14°F~122°F)	
Dimension(LxWxD)	480x189x140mm (18.89 x 7.44 x 5.51Inch)	
Net Weight	3.5kgs(7.71lbs)	

☐ SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

INTERFACE

