


## Vinyl-Insulated Spade Terminals

- Maximum electrical rating: 600 volts
- Maximum temperature: 75°C
- Terminals material : copper
- Plating: Tin plated
- Insulation material: vinyl (PVC)

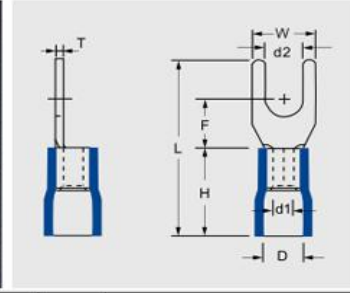

ITEM NO .	STUD SIZE		DIMENSION mm								PCS/ PACK	COLOR	EXPLANATION		
	Metric	American	d2	W	F	L	H	d1	D	T					
SV1.25-3.2	3	#4	3.2	5.7	6.5	21.2	10.0	1.7	4.2	0.8	100	● Red	Wire range : 0.5-1.5mm <sup>2</sup> A. W. G. : (22-16) Max.current=19A		
SV1.25-3.5S	3.5	#6	3.7												
SV1.25-3.5L	3.5	#6	3.7	6.4											
SV1.25-4S	4	#8	4.3	6.4											
SV1.25-4M	4	#8	4.3	7.2											
SV1.25-4L	4	#8	4.3	8.1											
SV1.25-5S	5	#10	5.3	9.5											
SV1.25-5L	5	#10	5.3	9.5											
SV1.25-6S	6	1/4 "	6.5	12.0										11.0	27.2
SV1.25-6L	6	1/4 "	6.5	12.0										11.0	27.2
SV1.25-8	8	5/16 "	8.5	13.5	11.5	26.7									
SV2-3.2	3	#4	3.2	5.7	6.5	21.2	10.0	2.3	4.7	0.8	100	● Blue	Wire range : 1.5-2.5mm <sup>2</sup> A. W. G. : (16-14) Max.current=27A		
SV2-3.5S	3.5	#6	3.7												
SV2-3.5L	3.5	#6	3.7	6.0											
SV2-4S	4	#8	4.3	6.4											
SV2-4M	4	#8	4.3	7.2											
SV2-4L	4	#8	4.3	8.1											
SV2-5S	5	#10	5.3	9.5											
SV2-5L	5	#10	5.3	9.5											
SV2-6S	6	1/4 "	6.5	12.0										11.0	27.2
SV2-6L	6	1/4 "	6.5	12.0										11.0	27.2
SV2-8	8	5/16 "	8.5	13.5	11.5	27.0									
SV3.5-3.5	3.5	#6	3.7	8.0	7.7	25.3	13.0	2.9	6.2	1.0	100	● Black	Wire range : 2.5-4mm <sup>2</sup> A. W. G. : (14-12) Max.current=37A		
SV3.5-4	4.0	#8	4.3												
SV3.5-5	5.0	#10	5.3	9.1										28.5	
SV3.5-6	6.0	1/4 "	6.5	12.0										9.1	28.5
SV3.5-8	8	5/16 "	8.5	14										11.5	30.7

ITEM NO .	STUD SIZE		DIMENSION mm								PCS/ PACK	COLOR	EXPLANATION		
	Metric	American	d2	W	F	L	H	d1	D	T					
SV1.25-3.2	3	#4	3.2	5.7	6.5	21.2	10.0	1.7	4.2	0.8	100	● Red	Wire range : 0.5-1.5mm <sup>2</sup> A. W. G. : (22-16) Max.current=19A		
SV1.25-3.5S	3.5	#6	3.7												
SV1.25-3.5L	3.5	#6	3.7	6.4											
SV1.25-4S	4	#8	4.3	6.4											
SV1.25-4M	4	#8	4.3	7.2											
SV1.25-4L	4	#8	4.3	8.1											
SV1.25-5S	5	#10	5.3	9.5											
SV1.25-5L	5	#10	5.3	9.5											
SV1.25-6S	6	1/4 "	6.5	12.0										11.0	27.2
SV1.25-6L	6	1/4 "	6.5	12.0										11.0	27.2
SV1.25-8	8	5/16 "	8.5	13.5	11.5	26.7									
SV2-3.2	3	#4	3.2	5.7	6.5	21.2	10.0	2.3	4.7	0.8	100	● Blue	Wire range : 1.5-2.5mm <sup>2</sup> A. W. G. : (16-14) Max.current=27A		
SV2-3.5S	3.5	#6	3.7												
SV2-3.5L	3.5	#6	3.7	6.0											
SV2-4S	4	#8	4.3	6.4											
SV2-4M	4	#8	4.3	7.2											
SV2-4L	4	#8	4.3	8.1											
SV2-5S	5	#10	5.3	9.5											
SV2-5L	5	#10	5.3	9.5											
SV2-6S	6	1/4 "	6.5	12.0										11.0	27.2
SV2-6L	6	1/4 "	6.5	12.0										11.0	27.2
SV2-8	8	5/16 "	8.5	13.5	11.5	27.0									

SV2-5L	5	#10	5.3	9.5														
SV2-6S	6	1/4 "	6.5															
SV2-6L	6	1/4 "	6.5		12.0	11.0	27.2											
SV2-8	8	5/16 "	8.5		13.5	11.5	27.0											
SV3.5-3.5	3.5	#6	3.7	8.0	7.7	25.3	13.0	2.9	6.2	1.0	100	● Black	Wire range : 2.5-4mm <sup>2</sup> A. W. G. : (14-12) Max.current=37A					
SV3.5-4	4.0	#8	4.3															
SV3.5-5	5.0	#10	5.3															
SV3.5-6	6.0	1/4 "	6.5											12.0	9.1	28.5		
SV3.5-8	8	5/16 "	8.5											14	11.5	30.7		