




JIANZI FASTENERS CO.,LTD

温州市坚字标准件有限公司

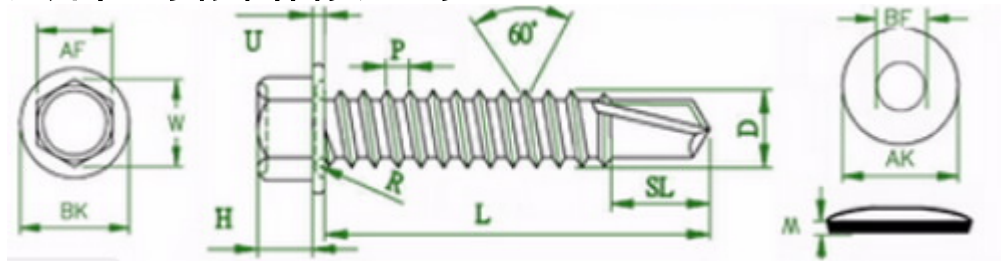

Hex head self-drilling screw

www.jz0577.com

DxL(mm)	W(mm)	AF(mm)	U(mm)	R(mm)	BK(mm)	H(mm)	Thickness range(mm)
ST3.5x(13~35)	5.96	5.41±0.09	0.6	0.5	7.95±0.35	3.325±0.125	0.7~2.25
ST3.9x(11~38)	5.96	5.41±0.09	0.6	0.5	7.95±0.35	3.325±0.125	0.7~2.4
ST4.2x(13~52)	7.59	6.89±0.11	0.9	0.6	8.5±0.3	4.125±0.125	1.75~3
ST4.8x(13~100)	8.71	7.89±0.11	0.9	0.7	10.15±0.35	4.3±0.15	1.75~4.4
ST5.5x(20~150)	8.71	7.89±0.11	1	0.8	10.5±0.5	5.3±0.15	1.75~5.25
ST6.3x(20~150))	10.95	9.44±0.06	1	0.9	12.7±0.5	6.3±0.15	2~6