



Product Description:

- Tinned, annealed, stranded or solid copper conductor.
- XL-PE insulation
- XL-PE jacketed
- Tinned or bare copper wire spiral or braid shield
- Rated temperature:150°C. Rated voltage:600V
- Passes UL VW-1&CUL FT1 vertical flame test

说明:

- 导体使用单股或绞线裸铜或镀锡铜。
- XL-PE绝缘
- XL-PE被覆
- 裸铜或镀锡铜丝，缠绕或编织屏蔽
- 额定温度：150℃ 额定电压：600V
- 可通过UL VW-1 及 CUL FT1 ，垂直燃烧测试

Applications:


- Internal wiring and external interconnection of electronic equipment

应用:

- 电子设备的内部布线和外部互连

Construction:

构造:

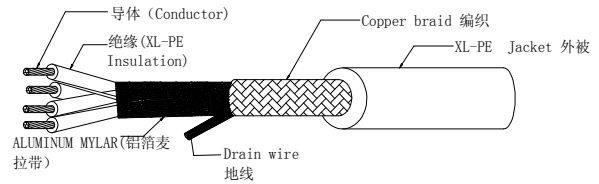

UL Style & CUL Type	Cores	Conductor		Insulation Thickness	Nom. Dia	Shield Coverage	Jacket Thickness	Overall Diameter	Conductor Resistance at 20°C
		AWG	No/mm						
UL21415 CUL (Stranded)	2C	30	7/0.100	0.38	1.10	>=65	0.76	4.40	381.00
		28	7/0.127	0.38	1.20	>=65	0.76	4.50	239.00
		26	7/0.16	0.38	1.30	>=65	0.76	4.60	150.00
		24	11/0.16	0.38	1.40	>=65	0.76	4.90	94.20
		22	17/0.16	0.38	1.60	>=65	0.76	5.10	59.40
		20	21/0.178	0.38	1.80	>=65	0.76	5.50	36.70
		18	34/0.178	0.38	2.10	>=65	0.76	6.10	23.20
		16	26/0.25	0.38	2.40	>=65	0.76	6.90	14.60
UL21415 CUL (Stranded)	3C	30	7/0.100	0.38	1.10	>=65	0.76	4.50	381.00
		28	7/0.127	0.38	1.20	>=65	0.76	4.70	239.00
		26	7/0.16	0.38	1.30	>=65	0.76	4.90	150.00
		24	11/0.16	0.38	1.40	>=65	0.76	5.10	94.20
		22	17/0.16	0.38	1.60	>=65	0.76	5.30	59.40
		20	21/0.178	0.38	1.80	>=65	0.76	6.00	36.70
		18	34/0.178	0.38	2.10	>=65	0.76	6.60	23.20
		16	26/0.25	0.38	2.40	>=65	0.76	7.40	14.60
UL21415 CUL (Stranded)	4C	30	7/0.100	0.38	1.10	>=65	0.76	4.70	381.00
		28	7/0.127	0.38	1.20	>=65	0.76	4.90	239.00
		26	7/0.16	0.38	1.30	>=65	0.76	5.20	150.00
		24	11/0.16	0.38	1.40	>=65	0.76	5.60	94.20
		22	17/0.16	0.38	1.60	>=65	0.76	5.90	59.40
		20	21/0.178	0.38	1.80	>=65	0.76	6.40	36.70
UL21415 CUL (Stranded)	5C	30	7/0.100	0.38	1.10	>=65	0.76	4.90	381.00
		28	7/0.127	0.38	1.20	>=65	0.76	5.10	239.00
		26	7/0.16	0.38	1.30	>=65	0.76	5.20	150.00
		24	11/0.16	0.38	1.40	>=65	0.76	5.60	94.20
		22	17/0.16	0.38	1.60	>=65	0.76	6.20	59.40
UL21415 CUL (Stranded)	6C	30	7/0.100	0.38	1.10	>=65	0.76	5.10	381.00
		28	7/0.127	0.38	1.20	>=65	0.76	5.50	239.00
		26	7/0.16	0.38	1.30	>=65	0.76	5.90	150.00
		24	11/0.16	0.38	1.40	>=65	0.76	6.20	94.20