

**Product Description:**

- Tinned ,annealed,stranded or solid copper conductor.
- Color -coded TPE insulation.
- Rated temperature:105℃ .Rated voltage:300volts
- Uniform thickness of wire to ensure easy stripping and cutting.
- Passes UL VW-1&CUL FT1 vertical flame test

**说明:**

- 导体使用单股或绞线裸铜或镀锡铜
- TPE绝缘
- 额定温度：105℃额定电压：300Volts
- 使用标准厚度，易剥，截断容易。
- 可通过UL VW-1 及 CUL FT1 ，垂直燃烧测试
- 可使用先绞后镀（TC）为导体

**Application**


- For use in relay leads or internal wiring of appliances, where protected against mechanical abuse

## 应用:

- 对于继电器的信息或电器设备内部布线，使用的地方保护，防止机械滥用。

**Construction:**

## 构造:

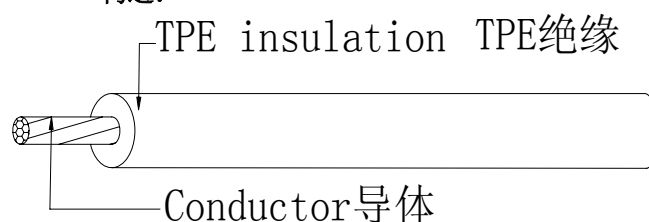

UL Style& CUL Type	Conductor		Insulation Thickness mm	Overall Diameter mm	Standard Put-up		Conductor Resistance at 20℃ Ω/KM
	AWG	No/mm			Ft/coil	M/Coil	
UL1876 CUL (Stranded)	30	7/0.10	0.31	1.00	2000	610	381.00
	28	7/0.127	0.31	1.10	2000	610	239.00
	26	7/0.16	0.31	1.20	2000	610	150.00
	24	11/0.16	0.31	1.30	2000	610	94.20
	22	17/0.16	0.31	1.50	2000	610	59.40
	20	21/0.178	0.31	1.70	2000	610	36.70
	18	34/0.178	0.31	2.00	2000	610	23.20
UL1876 CUL (Top-coated)	16	26/0.25	0.31	2.30	2000	610	14.60
	26	7/0.16	0.31	1.20	2000	610	140.00
	24	7/0.20	0.31	1.30	2000	610	88.70
	22	7/0.25	0.31	1.50	2000	610	54.70
	20	7/0.31	0.31	1.70	2000	610	37.10
	18	7/0.40	0.31	2.00	2000	610	23.70
UL1876 CUL (Solid)	16	7/0.488	0.31	2.30	2000	610	14.20
	26	1/0.404	0.31	1.20	2000	610	143.00
	24	1/0.511	0.31	1.30	2000	610	89.30
	22	1/0.643	0.31	1.50	2000	610	56.40
	20	1/0.813	0.31	1.70	2000	610	35.20
	18	1/1.024	0.31	2.00	2000	610	22.20
	16	1/1.29	0.31	2.30	2000	610	14.00