


Double Sockets Tee with lossing Flanged branch

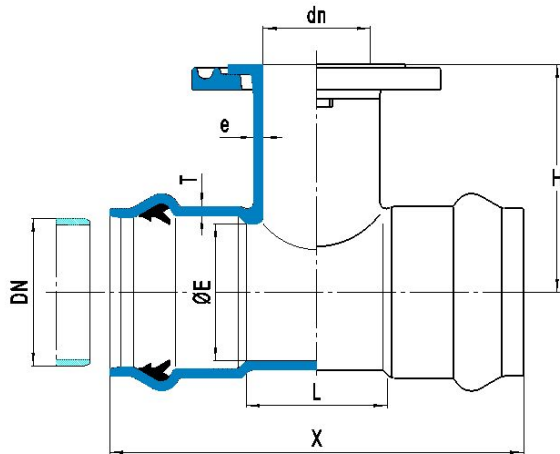

BODY: Ductile iron grade 500-7/ 450-12 in accordance with ISO 1083.

GASKET: Rubber E.P.D.M. in accordance with EN 681.1

WORKING PRESSURE: 16 Bar or 250 PSI

FLUID TEMPERATURE: 0°C-50°C, excluding frost.

EXTERNAL COATINGS : zinc coating +bitumen painting/liquid epoxy painting/epoxy applied by FBE Or according to customers' requirements.

INTERNAL COATINGS : cement mortar lining/liquid epoxy painting/epoxy applied by FBE/according to customers' requirements.

REFERENCE RULES: Dimensions and testing in accordance with ISO 2531/EN 545.

USE: Used for jointing the PVC pipes, they can assembled by pushing the spigot through the gasket in the socket of the mating component.

OD	dn	L	H	Mass (kg)		T	e	E	X	pattern
				PN10	PN16					
63	50	70	140	5.89	5.89	6.2	6.2	57	239	
63	60/65	80	140	7.08	7.08	6.2	6.2	57	249	
75	50	70	140	6.52	6.52	6.5	6.5	68	247	
75	60/65	85	140	7.80	7.80	6.5	6.5	68	262	
90	50	75	145	7.60	7.60	6.8	6.8	83	266	
90	60/65	90	155	9.02	9.02	6.8	6.8	83	281	
90	80	105	160	9.54	9.54	6.8	6.8	83	296	
110	50	75	145	9.40	9.40	7	6.5	102	279	
110	60/65	90	165	10.40	10.40	7	7	102	294	
110	80	105	170	10.95	10.95	7	7	102	309	
110	100	125	170	12.21	12.21	7	7	102	329	
125	40	65	160	9.26	9.26	7.2	7	116	278	
125	50	75	150	9.94	9.94	7.2	7	116	288	

OD	dn	L	H	Mass (kg)		T	e	E	X	pattern
				PN10	PN16					
125	60/65	90	160	11.41	11.41	7.2	7	116	303	
125	80	105	170	12.05	12.05	7.2	7	116	318	
125	100	125	180	13.53	13.53	7.2	7.2	116	338	
125	125	150	180	15.90	15.90	7.2	7.2	116	363	
140	40	65	160	10.58	10.58	7.5	7	130	289	
140	60/65	90	180	13.02	13.02	7.5	7	130	314	
140	80	105	185	13.64	13.64	7.5	7	130	329	
140	100	125	195	15.18	15.18	7.5	7.2	130	349	
140	125	150	200	17.84	17.84	7.5	7.5	130	374	
160	50	75	170	13.34	13.34	7.8	7	150	313	y
160	60/65	90	190	15.07	15.07	7.8	7	150	328	y
160	80	105	200	15.84	15.84	7.8	7	150	343	
160	100	125	205	17.38	17.38	7.8	7.2	150	363	y
160	125	150	210	20.08	20.08	7.8	7.5	150	388	y
160	150	175	220	23.47	23.47	7.8	7.8	150	413	
200	60/65	125	215	20.28	20.28	8	7	189	385	
200	80	140	225	21.18	21.18	8	7	189	400	
200	100	160	230	22.91	22.91	8	7.2	189	420	
200	125	185	240	25.95	25.95	8	7.5	189	445	
200	150	210	245	29.38	29.38	8	7.8	189	470	y
200	200	260	250	36.00	35.81	8	8	189	520	y
225	40	100	195	21.30	21.30	8.2	7	213	377	y
225	50	110	195	21.70	21.70	8.2	7	213	387	y
225	60/65	125	215	23.35	23.35	8.2	7	213	402	
225	80	140	225	24.31	24.31	8.2	7	213	417	
225	100	160	230	26.07	26.07	8.2	7.2	213	437	
225	125	185	240	29.21	29.21	8.2	7.5	213	462	
225	150	210	245	32.68	32.68	8.2	7.8	213	487	
225	200	260	260	39.60	39.40	8.2	8.2	213	537	
250	60/65	140	250	28.13	28.13	8.5	7	237	417	y
250	80	155	250	29.15	29.15	8.5	7	237	450	
250	100	175	255	31.13	31.13	8.5	7.2	237	470	
250	125	200	260	34.27	34.27	8.5	7.5	237	495	
250	150	225	265	37.96	37.96	8.5	7.8	237	520	
250	200	275	275	45.10	44.90	8.5	8.4	237	570	

N.M.M QINGDAO NANCY METAL & MACHINERY CO., LTD

OD	dn	L	H	Mass (kg)		T	e	E	X	pattern
				PN10	PN16					
250	250	325	285	53.80	53.36	8.5	8.5	237	620	
315	50	125	270	37.40	37.40	9	7	300	462	
315	60/65	140	290	39.08	39.08	9	7	300	477	
315	80	155	295	40.37	40.37	9	7	300	492	
315	100	175	300	42.74	42.74	9	7.2	300	512	
315	125	200	305	46.41	46.41	9	7.5	300	537	
315	150	225	310	50.50	50.50	9	7.8	300	562	
315	200	275	310	58.20	57.97	9	8.4	300	612	
315	250	325	310	66.90	66.52	9	9	300	662	y
315	300	375	310	76.20	75.82	9	9	300	712	
355	60/65	140	320	48.15	48.15	9.6	7	340	501	
355	80	155	325	49.67	49.67	9.6	7	340	516	
355	100	175	330	52.32	52.32	9.6	7.2	340	536	
355	150	225	340	60.84	60.84	9.6	7.8	340	586	
355	200	275	350	69.60	69.43	9.6	8.4	340	636	
355	250	325	360	79.60	79.17	9.6	9	340	686	
355	350	420	380	105.00	105.42	9.6	9.6	340	781	
400	80	175	340	61.47	61.47	10	7	385	559	
400	100	210	355	66.00	66.00	10	7.2	385	594	
400	150	275	360	76.63	76.63	10	7.8	385	659	
400	200	325	365	85.80	85.60	10	8.4	385	709	
400	250	370	375	95.90	95.45	10	9	385	754	
400	300	420	385	107.20	106.80	10	9.6	385	804	
400	400	520	395	133.20	136.80	10	10	385	904	

E-MAIL: nancygao@public.qd.sd.cn
nancygao@bdchina.com

TEL: 0086/532/66753307 OR 013953280182
 FAX: 0086/532/66753309 OR 85791651