
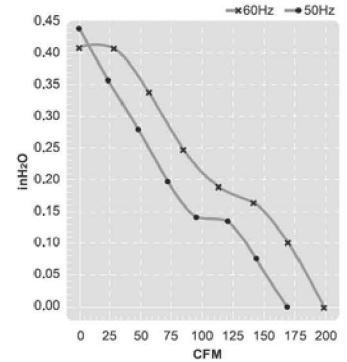


MODEL: EA1538 SERIES

Size : 172 x 150 x 38
Unit : mm

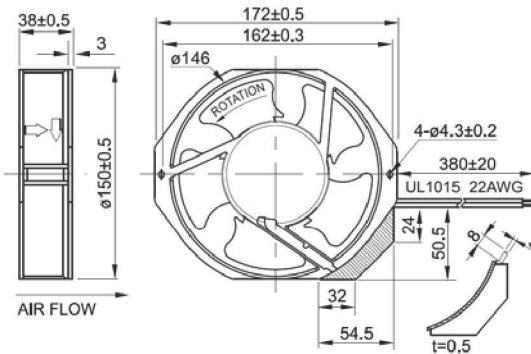

Impedance Protection

Terminal or Lead Wire Type





Model Spec	Rated Voltage V	Frequency Hz	Input Power W	Rated Current A	Locked Current A	Speed RPM	Maximum Air Flow m ³ /min	Maximum Air Flow CFM	Maximum Pressure mmH ₂ O	Maximum Pressure InchH ₂ O	Noise dB	Weight KG
EA1538-11HB	115V	50	36	0.50	0.66	2,750	4.7	166	11.0	0.43	50	0.78
		60	30	0.38	0.56	3,200	5.6	198	10.0	0.40	55	
EA1538-23HB	230V	50	37	0.25	0.32	2,750	4.7	166	11.0	0.43	50	0.78
		60	31	0.19	0.28	3,200	5.6	198	10.0	0.40	55	

We reserve the right to change data without notice.

MODEL: EA1538C SERIES

Size : 172 x 150 x 38
Unit : mm

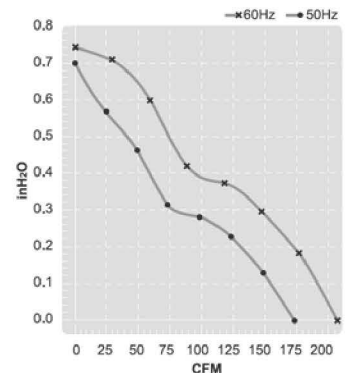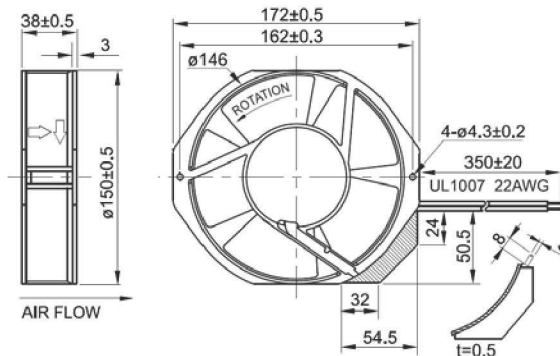

Thermal Protection

Terminal or Lead Wire Type



Model Spec	Rated Voltage V	Frequency Hz	Input Power W	Rated Current A	Locked Current A	Speed RPM	Maximum Air Flow m ³ /min	Maximum Air Flow CFM	Maximum Pressure mmH ₂ O	Maximum Pressure InchH ₂ O	Noise dB	Weight KG
EA1538C-11HB	115V	50	29	0.25	0.36	2,850	5.0	177	17.0	0.67	54	0.72
		60	28	0.23	0.38	3,400	6.0	212	19.0	0.75	58	
EA1538C-23HB	230V	50	27	0.11	0.18	2,850	5.0	177	17.0	0.67	54	0.72
		60	26	0.11	0.18	3,400	6.0	212	19.0	0.75	58	
EA1538C-11LB	115V	50	29	0.17	0.20	1,400	2.4	85	4.5	0.18	38	0.72
		60	28	0.15	0.20	1,700	2.9	103	6.5	0.26	44	
EA1538C-23LB	230V	50	27	0.08	0.10	1,400	2.4	85	4.5	0.18	38	0.72
		60	26	0.07	0.10	1,700	2.9	103	6.5	0.26	44	

We reserve the right to change data without notice.