


MODEL: EA1555C SERIES


Size : 172 x 150 x 55
Unit : mm



Thermal Protection

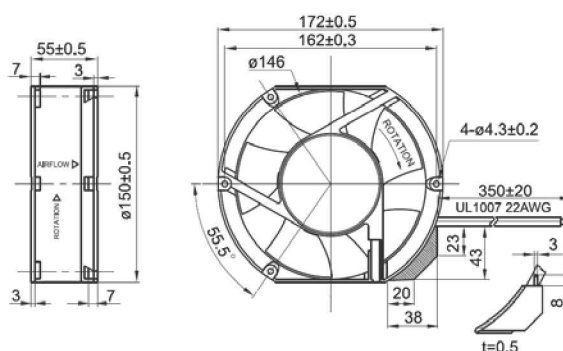

Terminal or Lead Wire Type

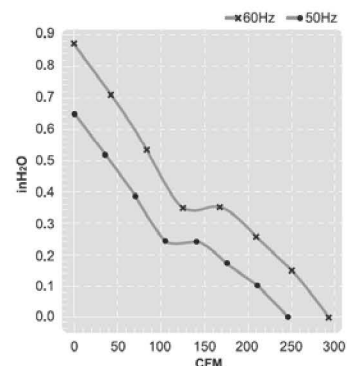

Model Spec	Rated Voltage V	Frequency Hz	Input Power W	Rated Current A	Locked Current A	Speed RPM	Maximum Air Flow m ³ /min	Maximum Air Flow CFM	Maximum Pressure mmH ₂ O	Maximum Pressure InchH ₂ O	Noise dB	Weight KG
EA1555C-11HB	115V	50	39	0.38	0.75	2,900	6.8	240	17.0	0.67	55	1.05
		60	38	0.34	0.76	3,400	8.3	293	23.0	0.90	60	
EA1555C-23HB	230V	50	38	0.18	0.38	2,900	6.8	240	17.0	0.67	55	1.05
		60	38	0.17	0.38	3,400	8.3	293	23.0	0.90	60	


We reserve the right to change data without notice.

MODEL: EA1555CR SERIES


Size : 172 x 150 x 55
Unit : mm



Thermal Protection

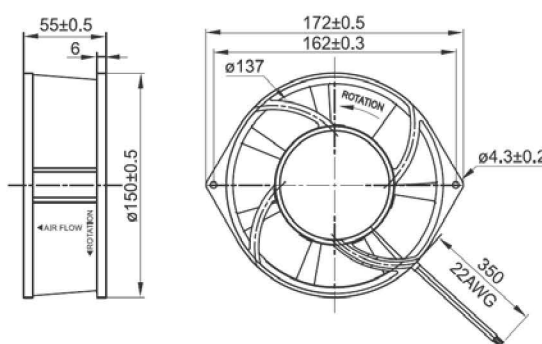

Lead Wire Type

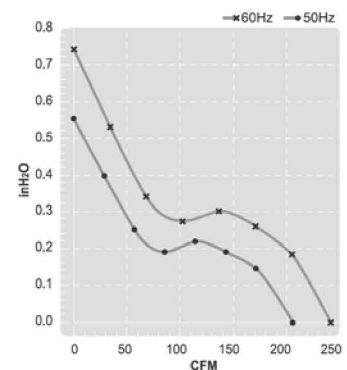

Model Spec	Rated Voltage V	Frequency Hz	Input Power W	Rated Current A	Locked Current A	Speed RPM	Maximum Air Flow m ³ /min	Maximum Air Flow CFM	Maximum Pressure mmH ₂ O	Maximum Pressure InchH ₂ O	Noise dB	Weight KG
EA1555CR-11HB	115V	50	26	0.24	0.58	2,850	5.8	205	14.0	0.55	61	1.08
		60	30	0.25	0.58	3,400	6.8	241	18.5	0.73	66	
EA1555CR-23HB	230V	50	26	0.11	0.28	2,850	5.8	205	14.0	0.55	61	1.08
		60	31	0.13	0.28	3,400	6.8	241	18.5	0.73	66	

We reserve the right to change data without notice.