

2.54mm (.100") SIP Socket


Specifications

- Voltage Rating : 100V AC/DC
- Current Rating : 3A AC/DC
- Withstanding Voltage : 1,000V AC/minute
- Insulation Resistance : 5,000V AC/minute
- Temperature Range : -40°C to + 105°C
- Contact Resistance : 10mΩ max.

Features:

- Part No. : JS-11791SFTD-XX
Poles : 2 - 40 (Single Row)
Material : Beryllium : Copper(Becu), Gold Plated
Sleeve Barrel : Brass, Tin Plated
Base : PPS UL94V-0
Q,ty : 1,000 pcs/Bag
- MALE SIP SOCKET
Part No. : JS-11791SMTD-XX
Pole : 2 - 40
Material : Contact : Brass, Tin Plated
Base : PPS UL94V-0
Q'ty : 1000 pcs./Bag

JS-11791SFTD

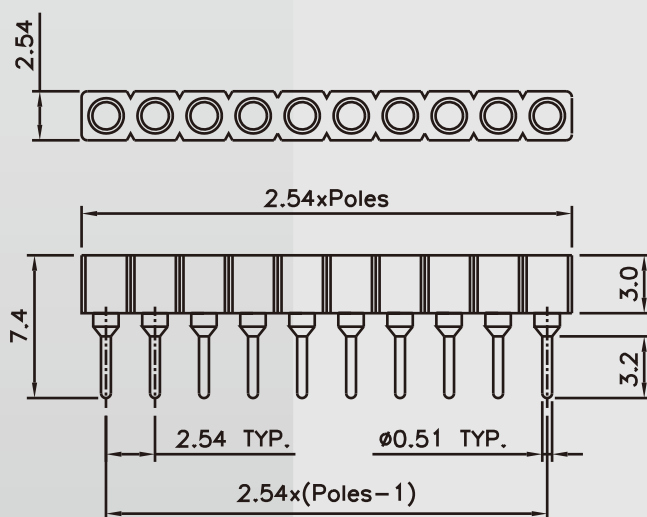

Recommand PCB Layout