


# ST(W)、STO(W)、STOO(W)、SE(W)、SEO(W)、SEOO(W)

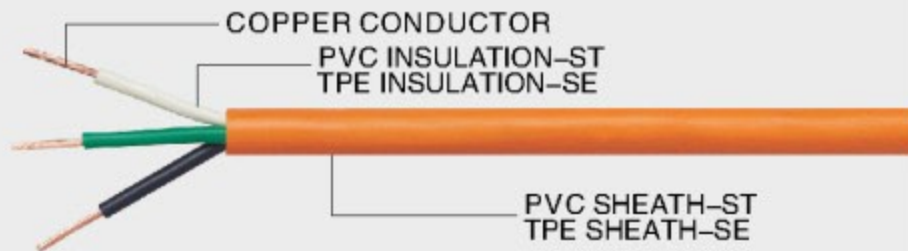

Standard: UL62  
Max Temp: 60°C/105°C

| 线号    | Conductor Construction<br>导体结构 | Insulation Thickness<br>绝缘厚度 | Sheath Nom.thick<br>护套厚度 | Approx.O.D<br>参考外径 |
|-------|--------------------------------|------------------------------|--------------------------|--------------------|
| AWG   | (NO./mm)                       | (mm)                         | (mm)                     | (mm)               |
| 18x2C | 41/0.16                        | 0.76                         | 1.52                     | 9.0                |
| 16x2C | 41/0.20                        | 0.76                         | 1.52                     | 9.3                |
| 14x2C | 41/0.254                       | 1.14                         | 2.03                     | 11.4               |
| 12x2C | 47/0.30                        | 1.14                         | 2.41                     | 14.5               |
| 10x2C | 74/0.30                        | 1.14                         | 2.41                     | 15.6               |
| 18x3C | 41/0.16                        | 0.76                         | 1.52                     | 9.5                |
| 16x3C | 41/0.20                        | 0.76                         | 1.52                     | 9.9                |
| 14x3C | 41/0.254                       | 1.14                         | 2.03                     | 13.2               |
| 12x3C | 47/0.30                        | 1.14                         | 2.41                     | 15.0               |
| 10x3C | 74/0.30                        | 1.14                         | 2.41                     | 16.9               |