



MODEL: EA2880BMA SERIES

Size : 280 x 280 x 80
Unit : mm

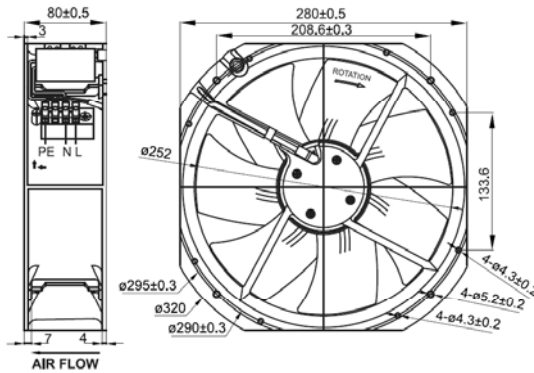

(Axial Fan)

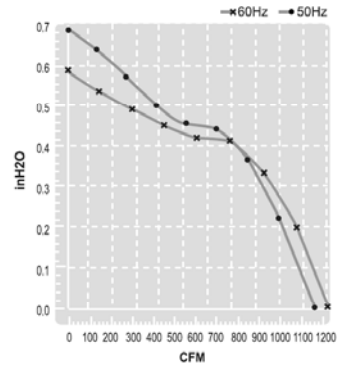

Thermal Protection




Model Spec	Rated Voltage V	Frequency Hz	Input Power W	Rated Current A	Locked Current A	Speed RPM	Maximum Air Flow m ³ /min	Maximum Air Flow CFM	Maximum Pressure mmH ₂ O	Maximum Pressure InchH ₂ O	Capacitor μF/VDB	Noise dB	Weight KG
EA2880BMA-11HC2A	115V	50	120	1.50	1.90	2,400	29.8	1,050	17.8	0.70	12/250	70	2.8
		60	157	1.20	1.90	2,600	31.2	1,100	15.0	0.59		71	
EA2880BMA-23HC2A	230V	50	119	0.52	0.83	2,400	29.8	1,050	17.8	0.70	4/450	70	2.8
		60	158	0.71	0.87	2,600	31.2	1,100	15.0	0.59		71	


We reserve the right to change data without notice.

MODEL: EA2880BMB SERIES

Size : 280 x 280 x 80
Unit : mm

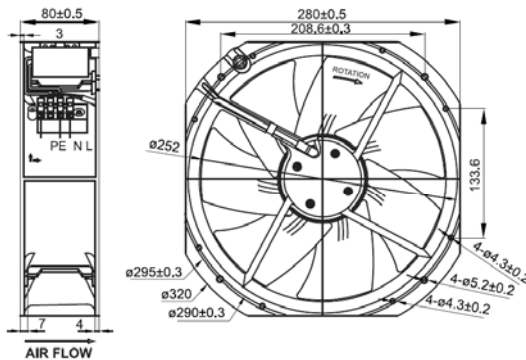

(Axial Fan)

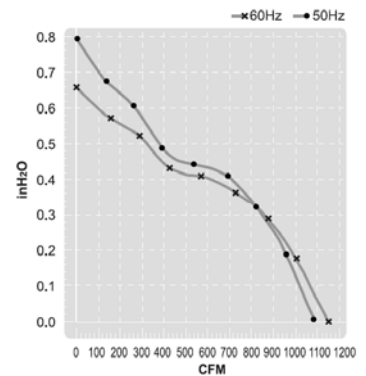

Thermal Protection



Model Spec	Rated Voltage V	Frequency Hz	Input Power W	Rated Current A	Locked Current A	Speed RPM	Maximum Air Flow m ³ /min	Maximum Air Flow CFM	Maximum Pressure mmH ₂ O	Maximum Pressure InchH ₂ O	Capacitor μF/VDB	Noise dB	Weight KG
EA2880BMB-11HC2A	115V	50	112	1.00	1.90	2,550	31.0	1,090	16.5	0.65	12/450	68	2.80
		60	148	1.50	1.90	2,700	32.0	1,130	20.0	0.78		70	
EA2880BMB-23HC2A	230V	50	119	0.59	0.91	2,550	31.0	1,090	16.5	0.65	4/450	68	2.80
		60	158	0.82	0.91	2,700	32.0	1,130	20.0	0.78		70	

We reserve the right to change data without notice.