

Product Description:

- Tinned, annealed, stranded or solid copper conductor.
- PVC or SR-PVC insulation
- PUR jacketed
- Tinned or bare copper wire spiral or braid shield
- Rated temperature:80°C.Rated voltage:600Volts
- Passes UL VW-1&CUL FT1 vertical flame test

说明:

- 导体使用单股或绞线裸铜或镀锡铜。
- PVC 或者SR-PVC绝缘
- PUR被覆
- 裸铜或镀锡铜丝，缠绕或编织屏蔽
- 额定温度：80℃额定电压：600Volts
- 可通过UL VW-1 及 CUL FT1 ，垂直燃烧测试


Applications:

■ Internal Wiring of Appliances; or Internal Wiring of Appliances where exposed to oil at a temperature not exceeding 60 deg C or 80 deg C, (whichever is applicable). Tags may indicate the following: 2500 Volts Peak - For Electronic Use Only

应用：
■ 家电的内部配线，或暴露在温度不超过60摄氏度或80摄氏度石油器具内部布线，（以适用者为准）。标签可能显示以下内容：2500伏特峰 - 仅电子使用

Construction:

构造:

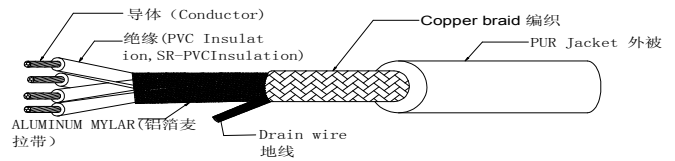

UL Style& CUL Type	Cores	Conductor		Insulation Thickness	Nom. Dia	Shield Coverage	Jacket Thickness	Overall Dimeter	Conductor Resistance at 20°C
		AWG	No/mm						
UL20939 CUL (Stranded)	2C	30	7/0.100	0.76	1.90	>=65	0.76	6.00	381.00
		28	7/0.127	0.76	2.00	>=65	0.76	6.30	239.00
		26	7/0.16	0.76	2.10	>=65	0.76	6.40	150.00
		24	11/0.16	0.76	2.20	>=65	0.76	6.60	94.20
		22	17/0.16	0.76	2.40	>=65	0.76	7.00	59.40
		20	21/0.178	0.76	2.50	>=65	0.76	7.40	36.70
		18	34/0.178	0.76	2.80	>=65	0.76	8.00	23.20
UL20939 CUL (Stranded)	3C	30	7/0.100	0.76	1.90	>=65	0.76	7.90	381.00
		28	7/0.127	0.76	2.00	>=65	0.76	8.10	239.00
		26	7/0.16	0.76	2.10	>=65	0.76	8.30	150.00
		24	11/0.16	0.76	2.20	>=65	0.76	8.50	94.20
		22	17/0.16	0.76	2.40	>=65	0.76	8.90	59.40
		20	21/0.178	0.76	2.50	>=65	0.76	9.40	36.70
		18	34/0.178	0.76	2.80	>=65	0.76	10.00	23.20
UL20939 CUL (Stranded)	4C	30	7/0.100	0.76	1.90	>=65	0.76	8.10	381.00
		28	7/0.127	0.76	2.00	>=65	0.76	8.30	239.00
		26	7/0.16	0.76	2.10	>=65	0.76	8.60	150.00
		24	11/0.16	0.76	2.20	>=65	0.76	8.90	94.20
		22	17/0.16	0.76	2.40	>=65	0.76	9.30	59.40
		20	21/0.178	0.76	2.50	>=65	0.76	9.80	36.70
UL20939 CUL (Stranded)	5C	30	7/0.100	0.76	1.90	>=65	0.76	8.40	381.00
		28	7/0.127	0.76	2.00	>=65	0.76	8.70	239.00
		26	7/0.16	0.76	2.10	>=65	0.76	8.80	150.00
		24	11/0.16	0.76	2.20	>=65	0.76	9.20	94.20
		22	17/0.16	0.76	2.40	>=65	0.76	9.80	59.40
UL20939 CUL (Stranded)	6C	30	7/0.100	0.76	1.90	>=65	0.76	8.80	381.00
		28	7/0.127	0.76	2.00	>=65	0.76	9.10	239.00
		26	7/0.16	0.76	2.10	>=65	0.76	9.40	150.00
		24	11/0.16	0.76	2.20	>=65	0.76	9.70	94.20