

Product Description:

- Tinned, annealed, stranded or solid copper conductor.
- PVC or SR-PVC insulation
- PUR jacketed
- Tinned or bare copper wire spiral or braid shield
- Rated temperature:80°C.Rated voltage:30, 120, 600Volts
- Passes UL VW-1&CUL FT1 vertical flame test

说明:

- 导体使用单股或绞线裸铜或镀锡铜。
- PVC 或者SR-PVC绝缘
- PUR被覆
- 裸铜或镀锡铜丝，缠绕或编织屏蔽
- 额定温度：80℃额定电压：30, 120, 600Volts
- 可通过UL VW-1 及 CUL FT1 ，垂直燃烧测试

Applications:


- Internal Wiring and External Interconnection of Electronic Equipment.

应用:

- 用于电子设备内部布线或外部连接

Construction:

构造:

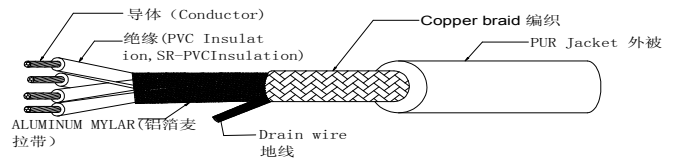

UL Style& CUL Type	Cores	Conductor		Insulation Thickness	Nom. Dia	Shield Coverage	Jacket Thickness	Overall Dimeter	Conductor Resistance at 20°C
		AWG	No/mm						
UL20948 CUL (Stranded)	2C	30	7/0.100	0.76	1.90	>=65	1.15	6.70	381.00
		28	7/0.127	0.76	2.00	>=65	1.15	7.00	239.00
		26	7/0.16	0.76	2.10	>=65	1.15	7.10	150.00
		24	11/0.16	0.76	2.20	>=65	1.15	7.30	94.20
		22	17/0.16	0.76	2.40	>=65	1.15	7.70	59.40
		20	21/0.178	0.76	2.50	>=65	1.15	8.10	36.70
		18	34/0.178	0.76	2.80	>=65	1.15	8.70	23.20
		16	26/0.25	0.76	3.10	>=65	1.15	10.90	14.60
UL20948 CUL (Stranded)	3C	30	7/0.100	0.76	1.90	>=65	1.15	8.60	381.00
		28	7/0.127	0.76	2.00	>=65	1.15	8.80	239.00
		26	7/0.16	0.76	2.10	>=65	1.15	9.00	150.00
		24	11/0.16	0.76	2.20	>=65	1.15	9.20	94.20
		22	17/0.16	0.76	2.40	>=65	1.15	9.60	59.40
		20	21/0.178	0.76	2.50	>=65	1.15	10.10	36.70
		18	34/0.178	0.76	2.80	>=65	1.15	10.70	23.20
		16	26/0.25	0.76	3.10	>=65	1.15	10.90	14.60
UL20948 CUL (Stranded)	4C	30	7/0.100	0.76	1.90	>=65	1.15	8.80	381.00
		28	7/0.127	0.76	2.00	>=65	1.15	9.00	239.00
		26	7/0.16	0.76	2.10	>=65	1.15	9.30	150.00
		24	11/0.16	0.76	2.20	>=65	1.15	9.60	94.20
		22	17/0.16	0.76	2.40	>=65	1.15	10.00	59.40
		20	21/0.178	0.76	2.50	>=65	1.15	10.50	36.70
UL20948 CUL (Stranded)	5C	30	7/0.100	0.76	1.90	>=65	1.15	9.10	381.00
		28	7/0.127	0.76	2.00	>=65	1.15	9.40	239.00
		26	7/0.16	0.76	2.10	>=65	1.15	9.50	150.00
		24	11/0.16	0.76	2.20	>=65	1.15	9.90	94.20
		22	17/0.16	0.76	2.40	>=65	1.15	10.60	59.40
UL20948 CUL (Stranded)	6C	30	7/0.100	0.76	1.90	>=65	1.15	9.50	381.00
		28	7/0.127	0.76	2.00	>=65	1.15	9.80	239.00
		26	7/0.16	0.76	2.10	>=65	1.15	10.10	150.00
		24	11/0.16	0.76	2.20	>=65	1.15	10.40	94.20