


H03VV-F

INDOOR POWER SUPPLY OF ELECTRIC APPLIANCES · 适用于小型室内器具、家电产品电力供应线

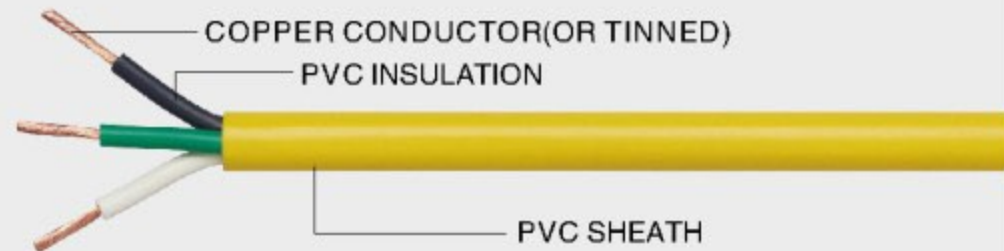

Standard: VDE0281
Rated Voltage: 300/300V
Max Temp: 70°C

Area (mm ²) 截面积	Conductor-导体		Insulation 绝缘体	Sheath 护套	Mean overall平均外径		Minimum insulation resistance at 70°C 70°C时最小 绝缘电阻 MΩ · km
	Construction (NO./mm) 结构	Diam.Of Single (mm) Max. 单支直径	Nom.thick(mm)厚度	Nom.thick(mm)厚度	Lower limit mm 下限	Upper limit mm 上限	
2x0.5	16/0.2	0.21	0.5	0.6	4.6	5.9	0.012
2x0.75	24/0.2	0.21	0.5	0.6	4.9	6.3	0.010
3x0.5	16/0.2	0.21	0.5	0.6	4.9	6.3	0.012
3x0.75	24/0.2	0.21	0.5	0.6	5.2	6.7	0.010
4x0.5	16/0.3	0.21	0.5	0.6	5.4	6.9	0.012
4x0.75	24/0.2	0.21	0.5	0.6	5.7	7.3	0.010