



MODEL: EA1551 SERIES

Size : 172 x 150 x 51
Unit : mm

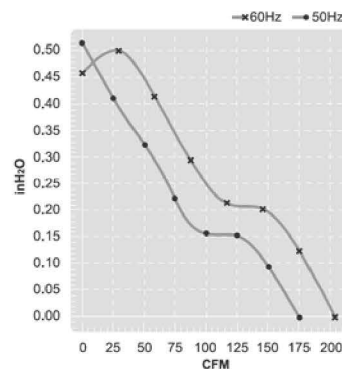

Impedance Protection

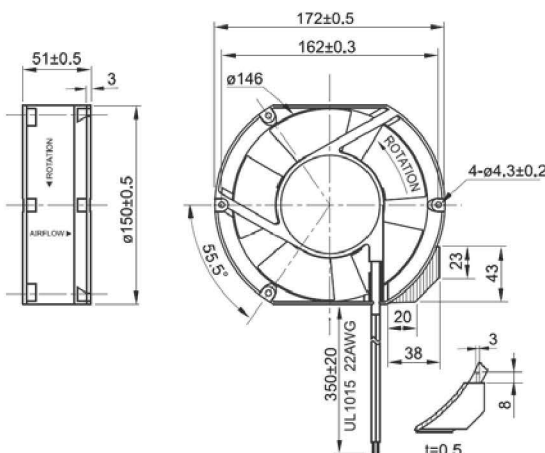

Terminal or Lead Wire Type



Model Spec	Rated Voltage V	Frequency Hz	Input Power W	Rated Current A	Locked Current A	Speed RPM	Maximum Air Flow m ³ /min	Maximum Air Flow CFM	Maximum Pressure mmH ₂ O	Maximum Pressure InchH ₂ O	Noise dB	Weight KG
EA1551-1HB	115V	50	32	0.43	0.51	2,750	4.8	170	10.5	0.42	50	0.90
		60	28	0.36	0.45	3,100	5.5	195	9.5	0.38	55	
EA1551-23HB	230V	50	35	0.23	0.29	2,750	4.8	170	10.5	0.42	50	0.90
		60	30	0.18	0.25	3,100	5.5	195	9.5	0.38	55	



We reserve the right to change data without notice.

MODEL: EA1551C SERIES

Size : 172 x 150 x 51
Unit : mm



Thermal Protection

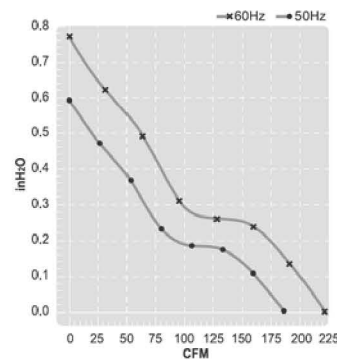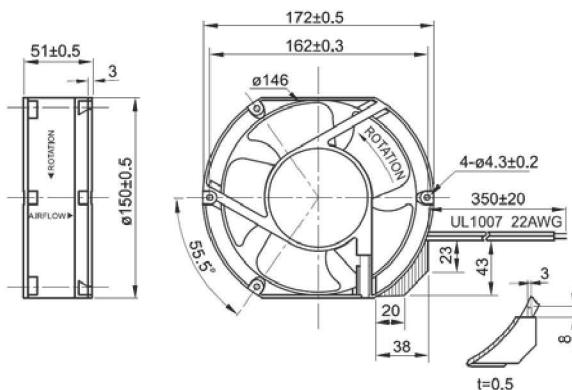

Terminal or Lead Wire Type



Model Spec	Rated Voltage V	Frequency Hz	Input Power W	Rated Current A	Locked Current A	Speed RPM	Maximum Air Flow m ³ /min	Maximum Air Flow CFM	Maximum Pressure mmH ₂ O	Maximum Pressure InchH ₂ O	Noise dB	Weight KG
EA1551C-11HB	115V	50	31	0.26	0.41	2,850	5.8	205	16.0	0.63	53	0.90
		60	31	0.25	0.43	3,400	6.4	226	20.0	0.79	58	
EA1551C-23HB	230V	50	29	0.12	0.19	2,850	5.8	205	16.0	0.63	53	0.90
		60	29	0.12	0.19	3,400	6.4	226	20.0	0.79	58	
EA1551C-11LB	115V	50	31	0.17	0.21	1,400	2.5	88	3.8	0.15	31	0.90
		60	31	0.15	0.20	1,700	3.0	106	5.5	0.22	37	
EA1551C-23LB	230V	50	29	0.08	0.09	1,400	2.5	88	3.8	0.15	31	0.90
		60	29	0.07	0.09	1,700	3.0	106	5.5	0.22	37	

We reserve the right to change data without notice.