



青島天一力國際貿易有限公司

**QingDao TLead International Co., Ltd**

Add: RM416, No.16, FuZhou Nan Road, Qingdao, 266071 China

Tel: +86-532-85775618 / 85754589

Fax: +86-532-85758711

Cell: +86-159 6324 2732


E-mail: [ma@tlead.biz](mailto:ma@tlead.biz)

Web: [www.tlead.biz](http://www.tlead.biz)

## Model SR3A13 Roller Feeding Wide Belt Sander



SR3A13-1

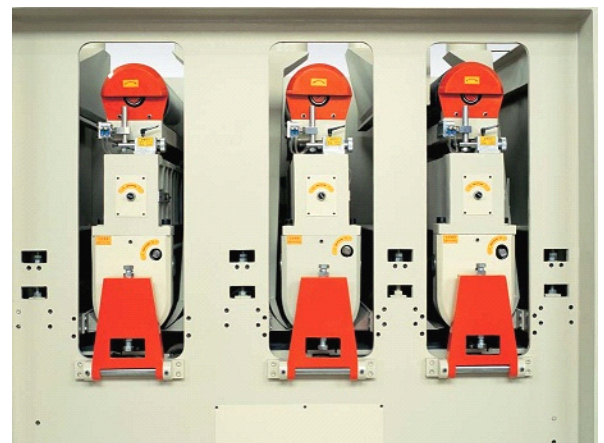

SR3A13-2

### Characteristics:

- The machine frame adopts welding integral structure to improve the machine's rigidity and the service life of the machine.
- The rollers' diameter is much bigger and the rollers have been run-balanced precisely, which makes running smoothly and improves the sanding power.
- Frequency-controlled feeding improves the productive efficiency.
- The feeding rollers are supported by floating spring. You can adjust the back pressure until satisfied with the sanding result.

The machine adopts the advanced computer terminal that makes the operation easy and clear.

- The machine adopts advanced man-machine interface, it can display dialogues directly.
- All the sanding heads are strong and reliable, it supplies you a stable sanding accurate.
- Controlled by the Programmable Controller (PC), the machine's movements are sensitive and reliable. And it can liaison net communicate with upper computer.

The machine adopts frequency-controlled drive, the feed speed is 13~100m/min.



# 青岛天一力国际贸易有限公司

## QingDao TLead International Co., Ltd

Add: RM416, No.16, FuZhou Nan Road, Qingdao, 266071 China

Tel: +86-532-85775618 / 85754589 Fax: +86-532-85758711

Cell: +86-159 6324 2732

E-mail: [ma@tlead.biz](mailto:ma@tlead.biz)

Web: [www.tlead.biz](http://www.tlead.biz)

Model	SR3A13	SR2A13	BSR13
Working Width	40~1300mm	40~1300mm	40~1300mm
Working Thickness	2.5~110mm	2.5~110mm	2.5~110mm
Working Length	≥750mm	≥750mm	≥750mm
No. 1 Sanding Belt Speed	20m/s	20m/s	20m/s
No. 2 Sanding Belt Speed	20m/s	17m/s	/
No. 3 Sanding Belt Speed	14m/s	/	/
Feed Speed	13~100m/min	13~100m/min	13~100m/min
Size of Sanding Belt	1330×2615 mm	1330×2615 mm	1330×2615 mm
Total Motors Power	106kW	76kW	46.35 kW
Main Motor Power	37,30,30kW	37,30kW	37 kW
Working Air Pressure	0.55MPa	0.55MPa	0.55MPa
Consumption of Compressed Air	0.1 m <sup>3</sup> /min	0.1 m <sup>3</sup> /min	0.1 m <sup>3</sup> /min
Speed of Sucked Air	25~30m/s	25~30m/s	25~30m/s
Volume of Sucked Air	12000m <sup>3</sup> /h	10000m <sup>3</sup> /h	8000m <sup>3</sup> /h
Overall Dimension	3150×2780×2520mm	2630×2780×2530mm	2870×1900×2450mm
Net Weight	11000kg	9000kg	5500kg

※All rights for technical modifications reserved.

### Qingdao Tlead International Co. Ltd.

Add: RM416, No.16, Fu Zhou Nan Road, Qingdao, 266071 China

Tel: +86-532-85775618 / 85754589

Fax: +86-532-85758711

Cell: +86-159 6324 2732

E-mail: [ma@tlead.biz](mailto:ma@tlead.biz)

Web: [www.tlead.biz](http://www.tlead.biz) [www.tlead.net](http://www.tlead.net) (old)

MSN: [tlead7@hotmail.com](mailto:tlead7@hotmail.com)

Skype: Tlead5

QQ:1413536121