

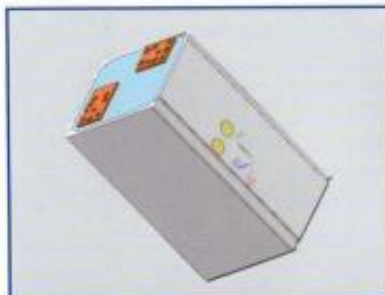
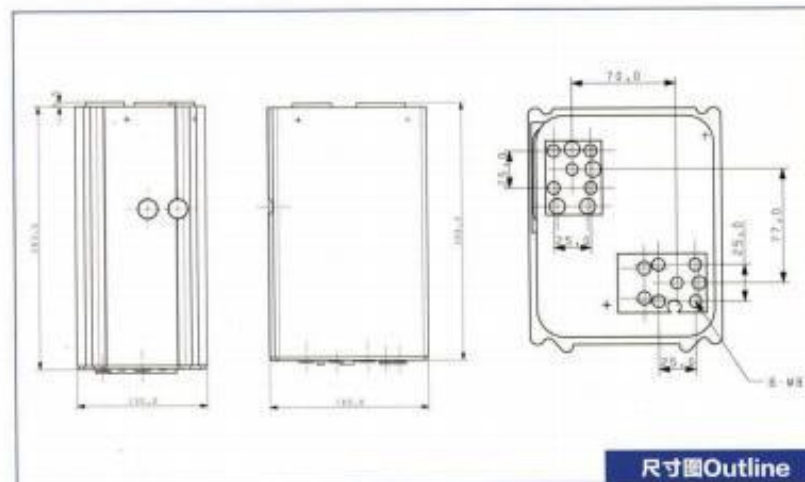


MF170T69SL01/MF300D40SL01

YZPST.

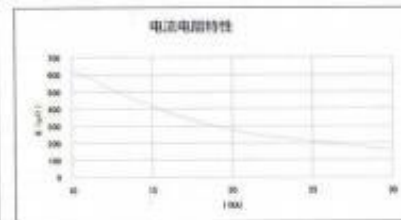

Primary access voltage 初级接入电压: 1000 kV, 500 V	1000V, 10 kA, 170 kVA/300 kVA
Secondary no-load voltage 次级空载电压: 7.2 V 0.5 V	1000V, 10 kA, 170 kVA/300 kVA
Turn ratio 匝比: 1000/10	1000V, 10 kA, 170 kVA/300 kVA
Cooling water requirements 冷却水要求: 40/min, <30°C	Maximum short circuit current 最大短路电流: 40 kA
Insulation grade 绝缘等级: F	Product weight 产品重量: 32 kg
Standard of execution 执行标准: GB15576-2008	Dielectric strength 耐压等级: 115000V

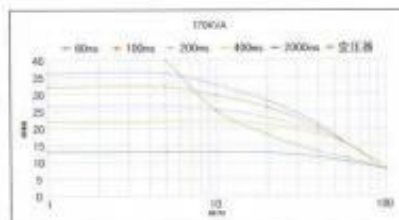

尺寸图Outline