


APPROVED BY:

Ver	Date	Modify Contents

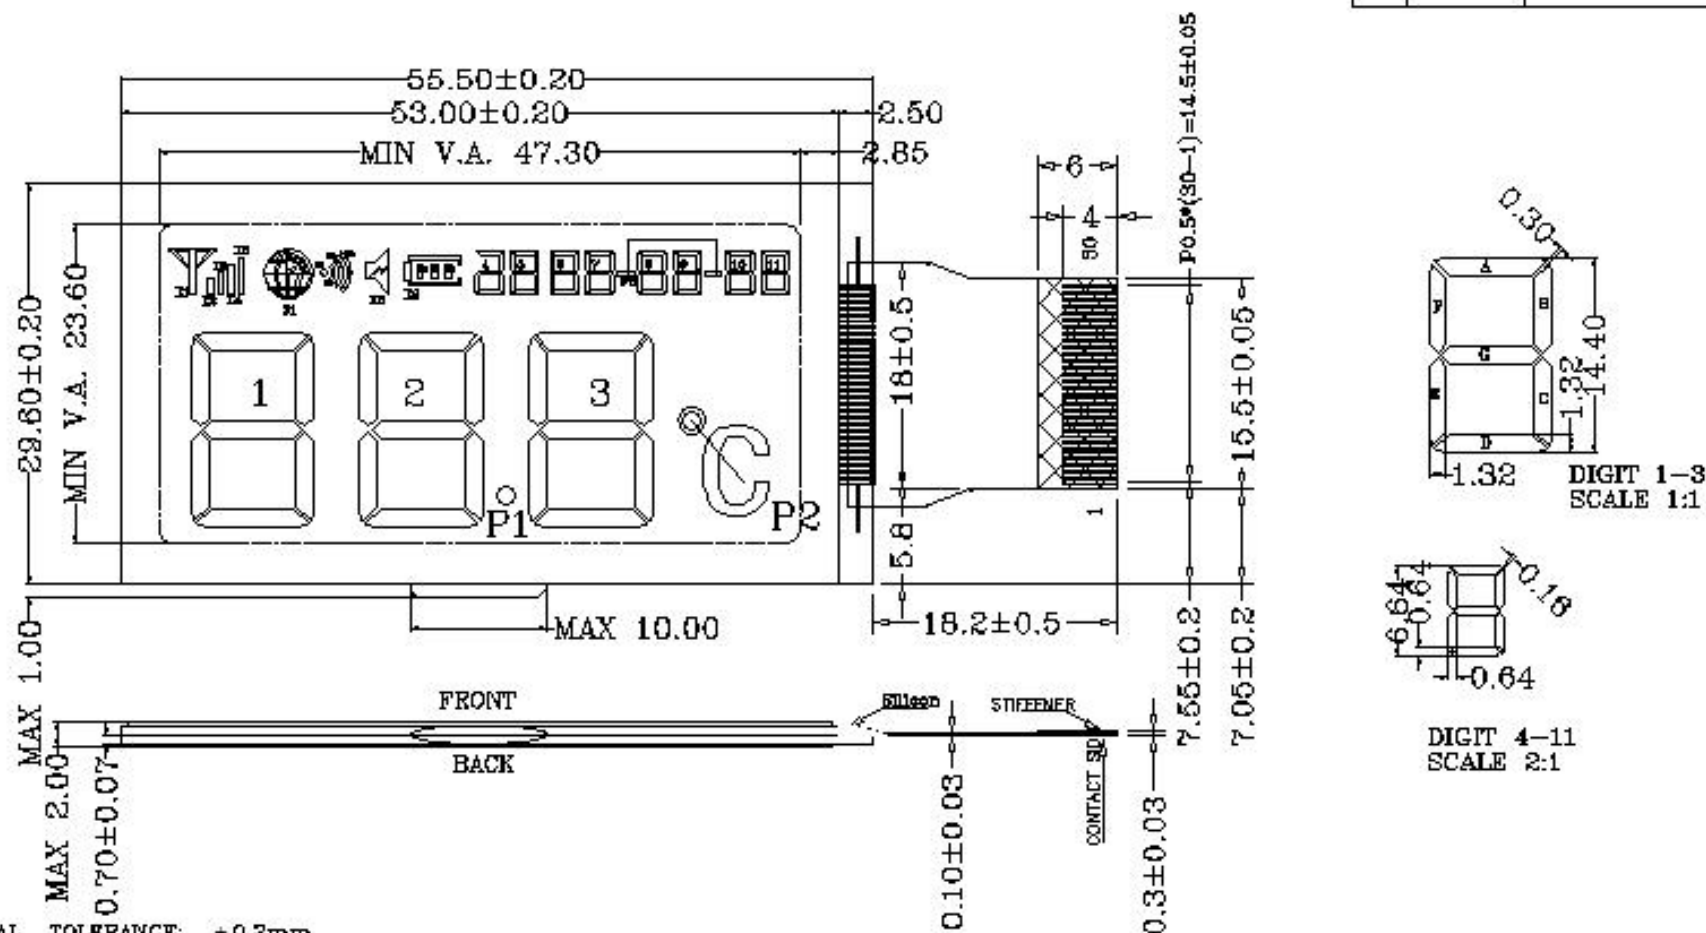

NOTE:

1. GENERAL TOLERANCE: $\pm 0.2\text{mm}$
2. DIMENSIONS WITH MARK "()" ARE REFERENCED, WITH MARK "*" ARE IMPORANT

LCD TYPE	STN	BACKLIGHT COLOR	----
POLARIZER TYPE	REFLECTIVE	FRAME TYPE	----
DISPLAY TYPE	POSITIVE	DATA TRANSFER	----
LCD COLOR	GREY	CONNECTOR TYPE	FPC
VIEWING ANGLE	6:00	TECHNOLOGY	----
OPERATING TEMP	-20°C ~ +70°C	DC-DC IC	----
STORAGE TEMP	-30°C ~ +80°C	LCD DUTY	1/4
BACKLIGHT TYPE	----	LCD BIAS	1/3
CONTROLLER IC	----	ROHS	----
REMARKS	Vop=2.8V		

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---



????????????

Anhui Golden Vision Optoelectronic Co., Ltd

PRODUCT NO.	GV2009FFGN011-1B136A				
DRAWN BY	FZJ 2013.11.29	SCALE	1:1	REV.	V01
CHECKED BY	CQ 2013.11.29	PAGE	4th		
APPROVED BY	Frank 2013.11.29	UNIT	mm		

发至: ☐ 开发部 ☐ 模块部 ☐ 品管部