


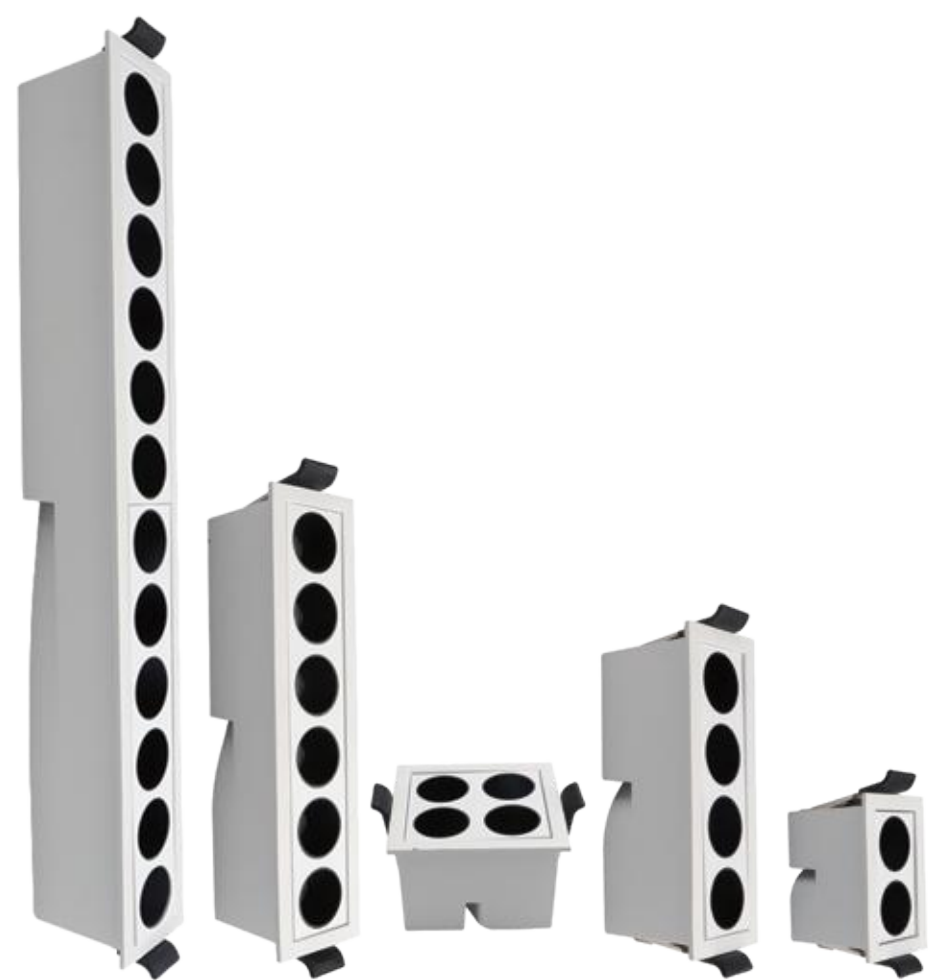

LED

High luminous efficiency SMD LED

Power supply

Flickering free power supply, short circuit and over voltage protection

Optics

Low glare optic system with PC lens

Installation

Recessed

Model No.	DSDL404301-4W	DSDL404302-8W	DSDL404303-8W	DSDL404304-12W	DSDL404305-24W
-----------	---------------	---------------	---------------	----------------	----------------

Electrical data

Power	2W X 2	2W X 4	2W X 4	2W X 6	2W X 12
Input voltage	200-220V AC or 120-277V AC				
Main frequency	50/60Hz				
Power factor	>0.9				
Total harmonic distortion	<10%				

Photometrical data

Luminous flux	400lm	800lm	800lm	1200lm	2400lm
Luminous efficiency	100lm/W				
Color temperature	3000K/4000K/6000K				
CRI	>80				
Beam angle	10°, 24°, 36°				

Material

Optic material	PMMA+PC
Housing material	Aluminum
Product surface finishing	Powder coating

Application

Operating temperature	-40°~ +60°
Operating humidity	10%-90%
IP rate	IP20
Application environment	Indoor
Dimmable	Optional
Lifespan & Warranty	Lifetime up to 50000H, 5 years warranty

Dimension & Color

Dimension symbol	a	b	c	a	b	c	a	b	c	a	b	c	a	b	c
Dimension (mm)	65	40	43	115	40	43	65	65	43	162	40	43	315	40	43



Color option

