


PCB Layout Top View

TRANSMITTER

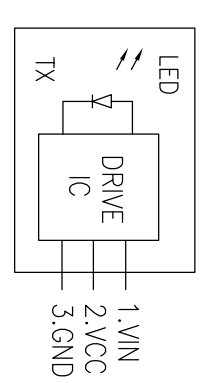

⑤	Pof Tx:Transmitter	1
④	Shutter:PA66 UL94V-0	1
③	Spring:SUS 301	1
②	Fix Pin:Copper Clad Steel	2
①	Body:PA66 UL94V-0,Black	1

- Finish:
- 1.1Metal Post & Tx Unit Solder Tails:
 - 2.54um [100 u"]Min Matte Tin Plating
 - 1.27um[50u"]Min Nickel Underplated Overall
 - 2).Recommended P.C.B Thickness:1.6mm
 - 3).Solder Heat Resistance: Wave Soldering 245°C For 3-5 Seconds.
 - 4). Δ Is Important Control Size.

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED		DESC 盛聰电子有限公司 SHENG CONG ELECTRONIC CO.,LTD	
General	Angle	CUSTOMER COPY	TITLE: OPTI JACK TX
X ± 0.50	X ± 3°	PART NO.	SC-OPTI-D002
XX ± 0.30	XX ± 2°	REV: A4	SHEET: 1 OF 1
XX ± 0.25			

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	DESIGN	Jason	17/01/05	CHECK	Jason	17/01/05
0	17/01/05		NEW	Jason	Max.hu						