


UL2562

BORT cable

RoHS & REACH compliant

环 保 引 领 未 来

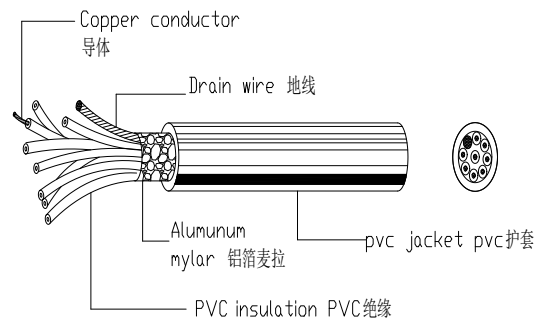

产 品 说 明

PRODUCT DESCRIPTION:

- ★Rated temperature: 80 °C
- ★Rated voltage: 300V
- ★According to the standard: UL758,UL1581,CSA C22.2
- ★Solid or Stranded,tinned or bare copper conductor 50AWG min
- ★PVC insulation,PVC jacket
- ★Tinned or Bare Copper wire spiral shield(optional)
- ★Passes UL VW-1-CSA FT1 and JQA-F-Mark flame test
- ★Uniform insulation thickness to ensure easy stripping and cutting
- ★Environmental testing pass RoHS
- ★For general purpose internal wiring of appliance

Part No.	Cores	Conductor			Insulation		Shield	Jacket		Maximum Resistance at 20°C Ω /km
		AWG	No./mm	Dia.	Nom.Thick.	Nom.Dia.	No./mm	Nom.Thick.	Nom.Dia.	
				mm	mm	mm		mm	mm	
149123	2	26	30/0.08	0.60	0.45	1.50	46/0.1	0.55x0.55	2.80x5.60	124.00
149124	3	28	7/0.127	0.38	0.56	1.50	39/0.12	41x0.41x0.41	2.70x8.40	223.00
149126	3	26	30/0.08	0.60	0.45	1.50	46/0.1	55x0.55x0.55	2.80x8.40	124.00