

|                      |                              |           |
|----------------------|------------------------------|-----------|
|                      | Model                        |           |
| Basic Specifications | Size                         |           |
|                      | Resolution                   |           |
|                      | Refresh rate                 |           |
|                      | Screen Type                  |           |
|                      | Screen Display Valid Zone    |           |
|                      | Dot Pitch                    |           |
|                      | Curvature                    |           |
|                      | Screen Ratio                 |           |
|                      | Backlight type               |           |
|                      | Brightness                   |           |
|                      | contrast Ratio               |           |
|                      | Colour Temperature           |           |
|                      | Number of colors             |           |
|                      | colour gamut                 | NTSC      |
|                      |                              | sRGB      |
|                      |                              | Adobe RGB |
|                      |                              | DCI-P3    |
|                      |                              | BT2020    |
|                      | Viewing Angle                |           |
|                      | Screen Response Time         |           |
|                      | Od Accelerated Response Time |           |
|                      | Input Interface              |           |
|                      | Input Interface              |           |
|                      | loudspeaker                  |           |
|                      | Audio interface              |           |
| Display Controls     | Control mode                 |           |
|                      | Language menu                |           |
| Power Supply         | power input                  |           |
|                      | power type                   |           |
|                      | Power Consumption            |           |
|                      | Anti-theft lock              |           |
|                      | VESA hole                    |           |
|                      | Bracket                      |           |
|                      | Colour                       |           |

|                                |                                                                 |                                    |
|--------------------------------|-----------------------------------------------------------------|------------------------------------|
| <b>Structure</b>               |                                                                 |                                    |
|                                | <b>Size</b>                                                     | <b>Without bracket</b>             |
|                                |                                                                 | <b>With bracket</b>                |
|                                |                                                                 | <b>Package size (horizontal)</b>   |
|                                |                                                                 | <b>Package size (vertical)</b>     |
|                                | <b>Weight</b>                                                   | <b>Net weight (including base)</b> |
|                                |                                                                 | <b>Gross weight</b>                |
|                                |                                                                 | <b>Base weight</b>                 |
|                                | <b>Angle of elevation</b>                                       |                                    |
|                                | <b>Rotation of the left and right</b>                           |                                    |
|                                | <b>Vertical Rotation</b>                                        |                                    |
|                                |                                                                 |                                    |
| <b>Application Environment</b> | <b>Storage Ambient Temperature</b>                              |                                    |
|                                | <b>Working Temperature</b>                                      |                                    |
|                                | <b>Working Humidity</b>                                         |                                    |
|                                | <b>Applicable Altitude</b>                                      |                                    |
|                                | <b>FOB SZ MOQ<math>\leq</math>100pcs</b>                        |                                    |
|                                | <b>FOB SZ 100pcs<math>\leq</math>MOQ<math>\leq</math>500pcs</b> |                                    |
|                                | <b>FOB SZ MOQ<math>\geq</math>1000 pcs</b>                      |                                    |
|                                | <p><b>PICTURE FRONT</b></p>                                     |                                    |

|  |                            |
|--|----------------------------|
|  | <p><b>PICTURE BACK</b></p> |
|--|----------------------------|

**\*Remarks**

- \* If adding speakers, it is usd1.5 extra, adding Audio por
  - \* Warranty: one year warranty
  - \* Delivery time for big order: 25-30 days after down pay
  - \* Lead time for samples: 7-10 days
  - \* Sample price: FOB SZ Price\*15%
  - \* Payment Terms : 30% downpayment in advance by T/
  - \* Quotation Validity Date: 7days
- Contact: Peggy Email:peggyxu@hwepc.com.cn Wechat:x

| MT2145                        |
|-------------------------------|
| 21.45 inch                    |
| 1920*1080                     |
| 60 to 75 HZ                   |
| VA                            |
| 478.656(H) x260.28(V)mm       |
| 0.241(H) x 0.241(V)mm         |
| Flat                          |
| 16: 9                         |
| LED                           |
| MAX:220cd/M <sup>2</sup>      |
| 3000:1                        |
| default:7500K 6500/7500/9300  |
| 16.7M                         |
| NTSC 72%                      |
| sRGB 99%                      |
| 75%                           |
| 75%                           |
| 53%                           |
| 178\178                       |
| 4-6.5ms                       |
| 4-6.5ms                       |
| VGA+HDMI                      |
| VGA: 1920*1080 60Hz           |
| HDMI1.4: 1920*1080 75Hz       |
|                               |
| Optional ( 8Ω/1W)             |
| AUDIO OUT (Optional)          |
| Five key button               |
| 7 languages max               |
| 100-240AC 50/60HZ             |
| external power supply 12V/2A  |
| Max:24W STB ≤0.5W,p. Typ. 15W |
| YES                           |
| 75*75mm                       |
| Hardware                      |
| Front: BLACK                  |
| Back cover: BLACK             |
| Back cover light: NO          |

|                        |
|------------------------|
| Stand: BLACK           |
| Base: BLACK            |
| 492*281*42mm           |
| Model B: 494*180*361mm |
| /                      |
| 555x355x100mm          |
| Model B: 2.2KG         |
| Model B: 3.2KG         |
| Model B: 0.445kg       |
| '-5°----15°            |
| /                      |
| /                      |
| -20°C~60°C             |
| 0°C~40°C               |
| 10~90%RH               |
| ≤5000m                 |
| \$48                   |
| \$46                   |
| \$40                   |





t, it is usd1.5 extra.

ment and confirming artwork

T,balance should be paid before loading .

xm13424236317 Skype:peggyxu77

| MS2145                        |
|-------------------------------|
| 21.45 inch                    |
| 1920*1080                     |
| 60 to 75 HZ                   |
| VA                            |
| 478.656(H) x260.28(V)mm       |
| 0.241(H) x 0.241(V)mm         |
| Flat                          |
| 16: 9                         |
| LED                           |
| MAX:220cd/M <sup>2</sup>      |
| 3000:1                        |
| default:7500K 6500/7500/9300  |
| 16.7M                         |
| NTSC 72%                      |
| sRGB 99%                      |
| 75%                           |
| 75%                           |
| 53%                           |
| 178\178                       |
| 4-6.5ms                       |
| 4-6.5ms                       |
| VGA+HDMI                      |
| VGA: 1920*1080 60Hz           |
| HDMI1.4: 1920*1080 75Hz       |
|                               |
| Optional ( 8Ω/1W)             |
| AUDIO OUT (Optional)          |
| Five key button               |
| 7 languages max               |
| 100-240AC 50/60HZ             |
| external power supply 12V/2A  |
| Max:24W STB ≤0.5W,p. Typ. 15W |
| YES                           |
| 75*75mm                       |
| Hardware                      |
| Front: BLACK                  |
| Back cover: BLACK             |
| Back cover light: NO          |

|                        |
|------------------------|
| Stand: BLACK           |
| Base: BLACK            |
| 492*281*42mm           |
| Model B: 497*200*366mm |
| /                      |
| 555x355x100mm          |
| Model B: 2.2KG         |
| Model B: 3.2KG         |
| Model B: 0.445kg       |
| '-5°----15°            |
| /                      |
| /                      |
| -20°C~60°C             |
| 0°C~40°C               |
| 10~90%RH               |
| ≤5000m                 |
| \$52                   |
| \$50                   |
| \$43                   |





| MT238                        |
|------------------------------|
| 23.8 inch                    |
| 1920*1080                    |
| 60 to 75 HZ                  |
| VA (IPS screen: 3usd extra)  |
| 527.04(H)×296.46(V)mm        |
| 0.2745(H) ×0.2745(V)         |
| Flat                         |
| 16: 9                        |
| LED                          |
| MAX:250cd/M <sup>2</sup>     |
|                              |
| default:7500K 6500/7500/9300 |
| 16.7M                        |
| NTSC 72%                     |
| sRGB 99%                     |
| 75%                          |
| 75%                          |
| 53%                          |
| 178\178                      |
| 4-6.5ms                      |
|                              |
| VGA+HDMI                     |
| VGA: 1920*1080 60Hz          |
| HDMI1.4: 1920*1080 75Hz      |
|                              |
| Optional ( 8Ω/1W)            |
| AUDIO OUT (Optional)         |
| Five key button              |
| 7 languages max              |
| 100-240AC 50/60HZ            |
| external power supply 12V/2A |
| Max:24W STB ≤0.5W, Typ. 18W  |
| YES                          |
| 75*75mm                      |
| Hardware                     |
| Front: BLACK                 |
| Back cover: BLACK            |
| Back cover light: NO         |

|                                                                                     |
|-------------------------------------------------------------------------------------|
| Stand: BLACK                                                                        |
| Base: BLACK                                                                         |
| 539*320*41mm                                                                        |
| Model B: 542*180*399mm                                                              |
| /                                                                                   |
| 604*112*403mm                                                                       |
| Model B: 2.93KG                                                                     |
| Model B: 3.93KG                                                                     |
| Model B: 0.445kg                                                                    |
| '-5°----15°                                                                         |
| /                                                                                   |
| /                                                                                   |
| -20°C~60°C                                                                          |
| 0°C~40°C                                                                            |
| 10~90%RH                                                                            |
| ≤5000m                                                                              |
| \$56                                                                                |
| \$54                                                                                |
| \$47                                                                                |
|  |



| MD238                        |
|------------------------------|
| 23.8 inch                    |
| 1920*1080                    |
| 60 to 75 HZ                  |
| VA (IPS screen: 3usd extra)  |
| 527.04(H)×296.46(V)mm        |
| 0.2745(H) ×0.2745(V)         |
| Flat                         |
| 16: 9                        |
| LED                          |
| MAX:250cd/M <sup>2</sup>     |
| 5000: 1                      |
| default:7500K 6500/7500/9300 |
| 16.7M                        |
| NTSC 72%                     |
| sRGB 99%                     |
| 75%                          |
| 75%                          |
| 53%                          |
| 178\178                      |
| 4-6.5ms                      |
|                              |
| VGA+HDMI                     |
| VGA: 1920*1080 60Hz          |
| HDMI1.4: 1920*1080 75Hz      |
|                              |
| Optional ( 8Ω/1W)            |
| AUDIO OUT (Optional)         |
| Five key button              |
| 7 languages max              |
| 100-240AC 50/60HZ            |
| external power supply 12V/2A |
| Max:24W STB ≤0.5W, Typ. 18W  |
| YES                          |
| 75*75mm                      |
| Hardware                     |
| Front: BLACK                 |
| Back cover: BLACK            |
| Back cover light: NO         |

|                                                                                     |
|-------------------------------------------------------------------------------------|
| Stand: BLACK                                                                        |
| Base: BLACK                                                                         |
| 539*320*41mm                                                                        |
| Model B: 542*180*399mm                                                              |
| /                                                                                   |
| 604*112*403mm                                                                       |
| Model B: 2.93KG                                                                     |
| Model B: 3.93KG                                                                     |
| Model B: 0.445kg                                                                    |
| '-5°----15°                                                                         |
| /                                                                                   |
| /                                                                                   |
| -20°C~60°C                                                                          |
| 0°C~40°C                                                                            |
| 10~90%RH                                                                            |
| ≤5000m                                                                              |
| \$58                                                                                |
| \$55                                                                                |
| \$48                                                                                |
|  |



| MS238                                 |
|---------------------------------------|
| 23.8 inch                             |
| 1920*1080                             |
| 60 to 75 HZ                           |
| VA (IPS screen: 3usd extra)           |
| 527.04(H)×296.46(V)mm                 |
| 0.2745(H) ×0.2745(V)                  |
| Flat                                  |
| 16: 9                                 |
| LED                                   |
| MAX:250cd/M <sup>2</sup>              |
| 5000: 1                               |
| default:7500K 6500/7500/9300          |
| 16.7M                                 |
| NTSC 72%                              |
| sRGB 99%                              |
| 75%                                   |
| 75%                                   |
| 53%                                   |
| 178\178                               |
| 4-6.5ms                               |
|                                       |
| VGA+HDMI                              |
| VGA: 1920*1080 60Hz                   |
| HDMI1.4: 1920*1080 75Hz               |
|                                       |
| Optional ( 8Ω/1W)                     |
| AUDIO OUT (Optional)                  |
| Five key button                       |
| 7 languages max                       |
| 100-240AC 50/60HZ                     |
| internal/external power supply 12V/2A |
| Max:24W STB ≤0.5W, Typ. 18W           |
| YES                                   |
| 100*100mm                             |
| Hardware                              |
| Front: BLACK                          |
| Back cover: BLACK                     |
| Back cover light: NO                  |

|                        |
|------------------------|
| Stand: BLACK           |
| Base: BLACK            |
| 539*320*41mm           |
| Model B: 542*201*422mm |
| /                      |
| 604*112*403mm          |
| Model B: 2.93KG        |
| Model B: 3.93KG        |
| Model B: 0.445kg       |
| '-5°----15°            |
| /                      |
| /                      |
| -20°C~60°C             |
| 0°C~40°C               |
| 10~90%RH               |
| ≤5000m                 |
| \$59                   |
| \$56                   |
| \$49                   |





| MD270                        |
|------------------------------|
| 27 inch                      |
| 1920*1080                    |
| 60 to 75 HZ                  |
| VA (IPS screen: 4usd extra)  |
| 597.888(H)×336.312(V)mm      |
| 0.3114*0.3114                |
| Flat                         |
| 16: 9                        |
| LED                          |
| MAX:300cd/M <sup>2</sup>     |
| 4000: 1                      |
| default:7500K 6500/7500/9300 |
| 16.7M                        |
| NTSC 72%                     |
| sRGB 99%                     |
| 75%                          |
| 75%                          |
| 53%                          |
| 178\178                      |
| SG2701B01-2: 8ms             |
| SG2701B01-2: 8ms             |
| VGA+HDMI                     |
| VGA: 1920*1080 60Hz          |
| HDMI1.4: 1920*1080 75Hz      |
|                              |
| Optional ( 8Ω/1W)            |
| AUDIO OUT (Optional)         |
| Five key button              |
| 7 languages max              |
| 100-240AC 50/60HZ            |
| external power supply 12V/3A |
| Max:36W STB ≤0.5W, Typ. 24W  |
| YES                          |
| 100*100mm                    |
| Hardware                     |
| Front: BLACK                 |
| Back cover: BLACK            |
| Back cover light: NO         |


|                        |
|------------------------|
| Stand: BLACK           |
| Base: BLACK            |
| 614*363*47 mm          |
| Model B: 616*201*449mm |
|                        |
| 680x115x420mm          |
| Model B: 4.34kg        |
| Model B: 5.71KG        |
| Model B: 0.8kg         |
| '-5°----15°            |
| /                      |
| /                      |
| -20°C~60°C             |
| 0°C~40°C               |
| 10~90%RH               |
| ≤5000m                 |
| \$76                   |
| \$73                   |
| \$63                   |





| MS270                                   |
|-----------------------------------------|
| 27 inch                                 |
| 1920*1080                               |
| 60 to 75 HZ                             |
| VA (IPS screen: 4usd extra)             |
| 597.888(H)×336.312(V)mm                 |
| 0.3114*0.3114                           |
| Flat                                    |
| 16: 9                                   |
| LED                                     |
| MAX:300cd/M <sup>2</sup>                |
| 4000: 1                                 |
| default:7500K 6500/7500/9300            |
| 16.7M                                   |
| NTSC 72%                                |
| sRGB 99%                                |
| 75%                                     |
| 75%                                     |
| 53%                                     |
| 178\178                                 |
| SG2701B01-2: 8ms                        |
| SG2701B01-2: 8ms                        |
| VGA+HDMI                                |
| VGA: 1920*1080 60Hz                     |
| HDMI1.4: 1920*1080 75Hz                 |
|                                         |
| Optional ( 8Ω/1W)                       |
| AUDIO OUT (Optional)                    |
| Five key button                         |
| 7 languages max                         |
| 100-240AC 50/60HZ                       |
| internal/external power supply 12V/3A   |
| Max:36W STB ≤0.5W, Typ. 24W             |
| YES                                     |
| 75*75mm                                 |
| Hardware (lifting bracket : 8usd extra) |
| Front: BLACK                            |
| Back cover: BLACK                       |
| Back cover light: NO                    |




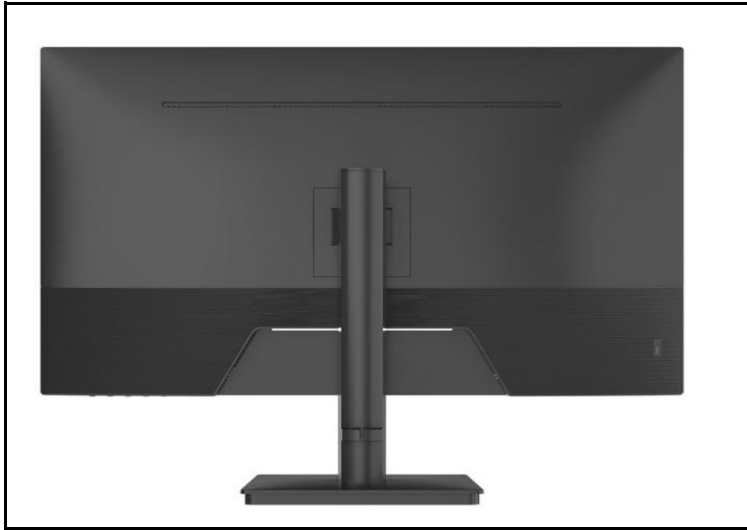

| MS270-2K                                |
|-----------------------------------------|
| 27 inch                                 |
| 2560*1440                               |
| 60 to 75 HZ                             |
| VA                                      |
| 597.888(H)×336.312(V)mm                 |
| 0.3114*0.3114                           |
| Flat                                    |
| 16: 9                                   |
| LED                                     |
| MAX:300cd/M <sup>2</sup>                |
| 4000: 1                                 |
| default:7500K 6500/7500/9300            |
| 16.7M                                   |
| NTSC 72%                                |
| sRGB 99%                                |
| 75%                                     |
| 75%                                     |
| 53%                                     |
| 178\178                                 |
| SG2701B01-2: 8ms                        |
| SG2701B01-2: 8ms                        |
| VGA+HDMI                                |
| VGA: 1920*1080 60Hz                     |
| HDMI1.4: 1920*1080 75Hz                 |
|                                         |
| Optional ( 8Ω/1W)                       |
| AUDIO OUT (Optional)                    |
| Five key button                         |
| 7 languages max                         |
| 100-240AC 50/60HZ                       |
| internal/external power supply 12V/3A   |
| Max:36W STB ≤0.5W, Typ. 24W             |
| YES                                     |
| 75*75mm                                 |
| Hardware (lifting bracket : 8usd extra) |
| Front: BLACK                            |
| Back cover: BLACK                       |
| Back cover light: NO                    |

|                        |
|------------------------|
| Stand: BLACK           |
| Base: BLACK            |
| 614*363*47 mm          |
| Model B: 614*203*464mm |
|                        |
| 674x438x184mm          |
| Model B: 4.34kg        |
| Model B: 5.71KG        |
| Model B: 0.8kg         |
| '-5°----15°            |
| /                      |
| /                      |
| -20°C~60°C             |
| 0°C~40°C               |
| 10~90%RH               |
| ≤5000m                 |
| \$116                  |
| \$112                  |
| \$97                   |



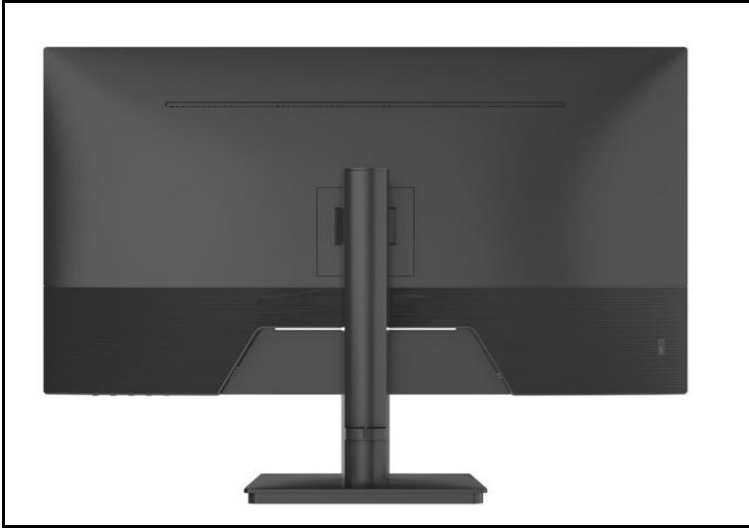

| MD315                        |
|------------------------------|
| 31.5 inch                    |
| 16:9                         |
| 60HZ TO 75HZ                 |
| ADS                          |
| 698.4mm(H) x 392.85mm(V)     |
| 0.36375(H) x 0.36375(V)      |
| Flat                         |
| 16:9                         |
| LED                          |
| MAX:300cd/m <sup>2</sup>     |
| 1000:1                       |
| default:7500K 6500/7500/9300 |
| 16.7M                        |
| 72%                          |
| 98%                          |
| 75%                          |
| 75%                          |
| 53%                          |
| 178/178 (H/V)                |
| 8ms                          |
| 8ms                          |
| HDMI+VGA+audio out(Optional) |
| VGA 1920*1080 60HZ           |
| HDMI 1.4 1920*1080 75HZ      |
|                              |
| 8Ω/3W (Optional)             |
| AUDIO OUT                    |
| Five key button              |
| 7 languages max              |
| 100-240AC 50/60HZ            |
| Built-in 45W                 |
| Max:45W STB ≤0.5W            |
| YES                          |
| 100*100mm                    |
| Hardware                     |
| Front: BLACK                 |
| Back cover: BLACK            |
| Back cover light:            |

|                |
|----------------|
| Stand: BLACK   |
| Base: BLACK    |
|                |
|                |
|                |
|                |
| 6.64KG         |
| 8.14KG         |
| Model A: 0.9kg |
| '-5°----15°    |
| /              |
| /              |
| -20°C~60°C     |
| 0°C~40°C       |
| 10~90%RH       |
| ≤5000m         |
| \$96           |
| \$93           |
| \$81           |



