

1

2




3

4

5

6

注：标注 请重点确认

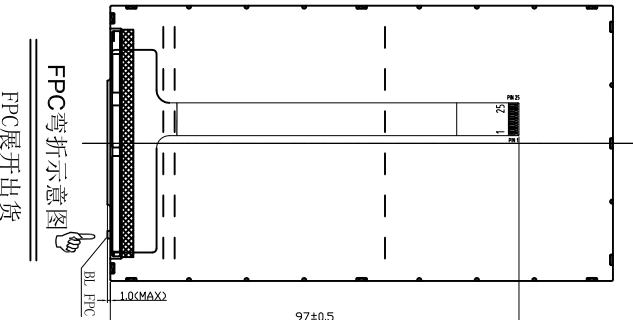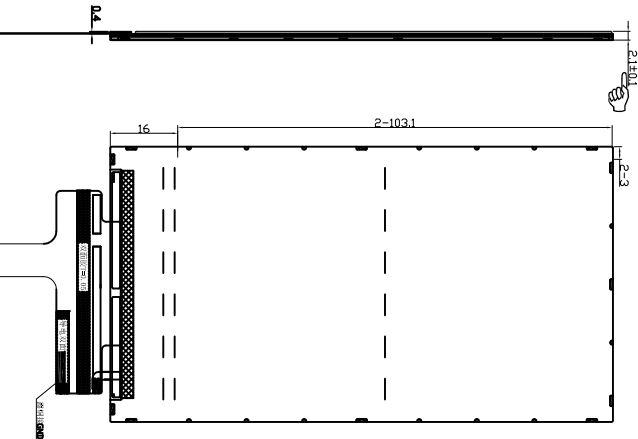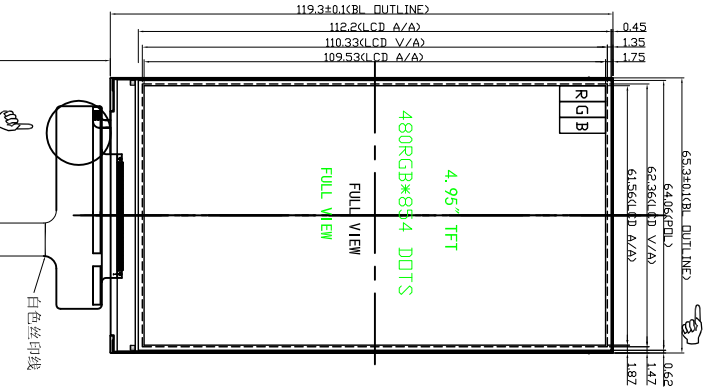

PIN No.	Name
1	LED A
2	LED K
3	VCC(2.8V)
4	IDVCC(1.8V)
5	GND
6	CLOCK_P
7	CLOCK_N
8	GND
9	DSI_D0N
10	DSI_D0P
11	GND
12	DSI_D1N
13	DSI_D1P
14	GND
15	DSI_D2N(NC)
16	DSI_D2P(NC)
17	GND
18	DSI_D3N(NC)
19	DSI_D3P(NC)
20	GND
21	TE
22	LCD_ID(PD)
23	LCD_RST
24	GND
25	GND

由 Autodesk 教育版产品制作

NOTES:

1. DRIVE IC :ST7701S
2. TYPE : TFT
3. DISPLAY MODE : Transmissive
4. Viewing Angle : ALL
5. BACKLIGHT:12 CHIP-WHITE LED
6. OPERATING TEMPERATURE: -20° C TO 70° C
7. STORAGE TEMPERATURE: -30° C TO 80° C
8. 产品满足ROHS要求
9. GENERAL TOLERANCE : ±0.2
10. 建议客户开窗尺寸比 POL单边小0.5mm, 防止露POL白边
11. 客户做假纯屏手机的, LENS上的双面胶不要粘在TP上, 要避开TP.
11. 客户机壳上的泡棉需进入玻璃单边0.3MM (MIN), 防止漏光.

修 改 内 容

修改者

修改日期

SCALE: FIT

SHEET: 1 OF 5

GENERAL TOL: ±0.2

UNIT mm

APPROVALS

DATE

MODEL NUMBER

PROJECTION

PART NO:

Newvision Technology

D

1

Added 0.4T tape for supporting glass gap before laminate CTP.

2

delete 0.4T tape

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5